



2022-23 Catalogue

The History of Access Irrigation

Access was started in 1958 by Mr Graham Pearce, an industrial chemist who had traded chemistry for the 'good life' running a small market garden in Crick, Northamptonshire. To try and get a better price for his strawberries, he designed an innovative glass and steel cold frame with sliding glass sides for easy access – hence our name Access.



Original drip nozzle

The sandy soil at Crick caused low strawberry yields and it was decided to concentrate instead on selling the cold frame. Before the invention of the polytunnel, cold frames were a low cost way of growing under glass. As nurseries

and growers began to take up the cold frames with enthusiasm, attention was turned to providing irrigation inside the frames. Unhappy with the nozzles already available, Mr Pearce used his scientific background to design his own.

The invention of the polythene tunnel caused the company to refocus. Cold frames were then targeted at the keen gardener and the irrigation division was formed

to supply growers with irrigation - still in its infancy in the UK.

From its horticultural roots, the irrigation division of Access focuses on 3 main areas: horticulture, landscape and more recently green systems including rainwater recycling and green roofs. All systems are designed to the same exacting standards of efficiency and durability as our horticultural irrigation systems.

In 2001 the company launched its highly respected components catalogue, coupling professional quality components with helpful tips and advice.



Original cold frames at Crick

Our premises on the original site



Green roof system

The Access philosophy, instilled by Mr Pearce in the 1960's, has always been to provide innovative products coupled with good customer service. From advice to supply, Access are able to offer a fast, friendly service backed up by our own specialist design function and dedicated warehouse.

We are here to help.

Request our Irrigation Guides











Welcome to our 2022-23 catalogue

Welcome to our latest catalogue, filled with professional quality irrigation components.

Order ONLINE

Our new website allows you to browse and purchase our entire product range quickly and easily. You can also download relevant PDF information sheets. Items with this logo have bulk pricing online.



FREE Economy Delivery

For not so urgent orders we can offer a FREE delivery service on orders over £125 in value*.

STANDARD Delivery

We deliver fast, as standard, using fully traceable carriers. For landscapers we can even deliver direct to the clients address, allowing work to start as soon as the goods arrive.

NEXT DAY Delivery

For really urgent orders, we also offer a next day service for items in stock. If necessary, items can be put on an AM delivery*.

COMPETITIVE Pricing

Access offer quality irrigation components at competitive prices, so you can always be sure of a good deal - and all backed up by our friendly and knowledgeable sales team!

We look forward to assisting you.



Mark Lambert Head of Technical Design mark@access-irrigation.co.uk



Kerryanne Jewe Irrigation Sale Advisor kerryanne@access-irrigation.co.uk 01788 220 401



Mike Briley Sales Director mike@access-irrigation.co.uk 01788 220 400



Accounts / Despatch eileen@access-irrigation.co.uk 01788 220 402



Matthew Pearce Director matthew@access-irrigation.co.uk 01788 220 403



Irrigation Sale Advisor iosh@access-irrigation.co.uk 01788 229 901



Liquid Feeding

Nursery

Mist Propagation

Sprinklers 10

Hand Watering 14

Landscape 18

Control Systems 28

Pumps 32

Pipe & Fittings 37

Sports 48

Order Information 52

Index 53

For more information on our free delivery, standard despatch and same day despatch services, see page 52.

Liquid Feeding

A pressure regulator must be fitted to all systems capable of delivering above the rated pressure. For fertilisers Water Regulations require a double check valve (see p45) in domestic situations or a pump and tank set for commercial use to prevent back-contamination.

Static Dilutors











Fill the Static Dilutor bottle with liquid feed, select the appropriate jet and connect to the water supply.

As water passes through the dilutor head it draws up a ratio of liquid feed which mixes with the water.

Designed to be filled, put near the tap, and then not moved until it is emptied. Max operating pressure 2.5 bar.

| Capacity Flow Rate | | Rate | Connector | Jets | Code | Price £ |
|--------------------|---------|-----------------|-----------------------------|----------|----------------------|---------|
| оарасну | min | max | Type | Supplied | Code | FIICE Z |
| | | Brass | Brass quick connector | 10:1 | | |
| 9.0L | 0.3m³/h | 0.3m³/h 2.3m³/h | | 25:1 | ADS (normal flow) | 00.00 |
| 2 gal | 60 gph | 500 gph | | 50:1 | | 69.00 |
| | | | & 'Geka' | 100:1 | | |

Mobile Dilutor


The Mobile Dilutor gives extra versatility. The liquid feed is kept inside an inner bag. This has a number of advantages, the unit need only be part filled, it can be moved from tap to tap without disturbing the final dilution rate and it can be left part-filled overnight.

A wider range of chemicals including those of a similar density to water can be used.

The bottle will withstand 4.0 bar pressure and is manufactured from heavy duty polythene.

| Pressure | Flow | Rate | Jets | Code | Price £ | |
|---------------|-------------------|--------------------|-------------------------|------|---------|--|
| FIGSSUIG | min max | | Supplied | Gode | FIICE Z | |
| 4.0 bar | 0.3m³/h 60 gph | 3.4m³/h 750 gph | 100:1 150:1 200:1 | ADMP | 199.00 | |
| Snap connecto | or conversion kit | ADM-FQC | 15.00 | | | |

The ideal Dilutor where greater sophistication is useful.



Capacity: 6.5L/1.4 gal. 'Geka' type connections are supplied as standard.




ADMP

Dilutor Spares

| | ADS | Price £ | ADSH | Price £ | ADM | Price £ | ADMP | Price £ |
|--|---------|---------|-----------------------------------|---------|---------|---------|----------|---------|
| Replacement Bottle * | ADS-BTL | 28.00 | ADS-BTL | 28.00 | ADM-BTL | 35.00 | ADMP-BTL | 149.00 |
| Replacement Head and boss * | ADS-HBA | 32.00 | ADSH-HBA | 29.00 | | | | |
| 1 downtube and jet pack * (ADM jet pack only) | ADS-JTP | 6.50 | ADSH-JTP | 6.50 | ADM-JP | 4.00 | ADM-JP | 4.00 |
| Replacement head assembly | | | | | ADM-HDA | 34.00 | ADM-HDA | 30.00 |
| Replacement boss and stem | | | | | ADM-BSA | 32.00 | ADMP-BSA | 30.00 |
| Replacement inner bag * | | | | | ADM-BAG | 14.00 | ADM-BAG | 14.00 |
| Pressure regulator kit with Gekas (all models) * | AD-PR | 28.00 | * compatible with post 2005 units | | | | | |



AD-PR pressure regulator

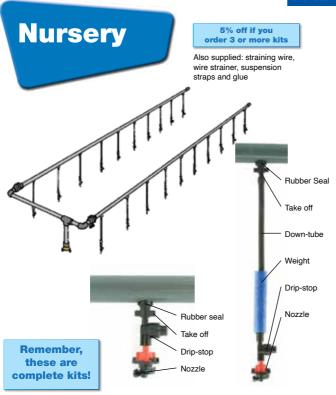

Glasshouses




The Access Mini-spin nozzle gives a very even level of distribution.

The bridge-less design has a rotating anvil which shatters the water into evenly spread particles. In comparison, the tiniest blemish or build up of lime on a fixed anvil nozzle gives permanently uneven distribution.

The nozzle fits at the end of a flexible dropper tube. In low tunnels the pipe lines can be above head height, yet allow the nozzle to remain at a height to ensure the best distribution pattern without "bounce back". Drip-stop valves are fitted to each nozzle. Glue included.

All designs give high uniformity



When ordering - quote code and length required, e.g. KU3-10

Multi-span Houses Lines can be linked together to a header pipe, with valves or solenoid valves to each line. Contact our sales team. 🔊

| Spra | y line | Tunnel width Price £ | | | | | Glasshouse width Price £ | | Price £ | |
|------|-------------------|----------------------|-------------|-------------|----------------------|-------------|--------------------------|-------------|-------------|-----------|
| len | igth | KU3 | KU4 | KU5 | KU6 | KU8 | KU9 | KW4 | KW6 | KW9 |
| m | ft | 3.0m 10' | 4.2m 14' | 5.5m 18' | 6.4m+7.3m 21'+24' | 8.2m 27' | 9.1m 30' | 4.5m 15' | 6.1m 20' | 9m 30' |
| 10 | 31 | 91.00 | 91.00 | 204.00 | 204.00 | 204.00 | 204.00 | 88.00 | 170.00 | 170.00 |
| 12.5 | 41 | 98.00 | 98.00 | 220.00 | 220.00 | 220.00 | 220.00 | 95.00 | 190.00 | 190.00 |
| 15 | 49 | 106.00 | 106.00 | 266.00 | 266.00 | 266.00 | 266.00 | 103.00 | 232.00 | 232.00 |
| 17.5 | 57 | 114.00 | 114.00 | 282.00 | 282.00 | 282.00 | 282.00 | 111.00 | 252.00 | 252.00 |
| 20 | 66 | 123.00 | 123.00 | 298.00 | 298.00 | 298.00 | 298.00 | 121.00 | 270.00 | 270.00 |
| 22.5 | 74 | 133.00 | 133.00 | 317.00 | 317.00 | 317.00 | 317.00 | 131.00 | 289.00 | 289.00 |
| 25 | 82 | 141.00 | 141.00 | 336.00 | 336.00 | 336.00 | 336.00 | 140.00 | 309.00 | 309.00 |
| 27.5 | 90 | 180.00 | 180.00 | 381.00 | 381.00 | 381.00 | 381.00 | 169.00 | 346.00 | 346.00 |
| 30 | 98 | 189.00 | 189.00 | 399.00 | 399.00 | 399.00 | 399.00 | 199.00 | 404.00 | 404.00 |
| 32.5 | 107 | 199.00 | 199.00 | 425.00 | 425.00 | 425.00 | 425.00 | 208.00 | 426.00 | 426.00 |
| 35 | 115 | 209.00 | 209.00 | 455.00 | 455.00 | 455.00 | 455.00 | 218.00 | 455.00 | 455.00 |
| 37.5 | 123 | 218.00 | 218.00 | 472.00 | 472.00 | 472.00 | 472.00 | 227.00 | 474.00 | 474.00 |
| 40 | 131 | 228.00 | 228.00 | 519.00 | 519.00 | 519.00 | 519.00 | 237.00 | 513.00 | 513.00 |
| 42.5 | 139 | 237.00 | 237.00 | 538.00 | 538.00 | 538.00 | 538.00 | 246.00 | 532.00 | 532.00 |
| 45 | 148 | 247.00 | 247.00 | 554.00 | 554.00 | 554.00 | 554.00 | 256.00 | 550.00 | 550.00 |
| | used per n run | 70 l/h | 160 l/h | 140 l/h | 210 l/h | 240 l/h | 320 l/h | 160 l/h | 210 l/h | 320 l/h |

Supplied with 2.5m lengths of pre-drilled and socketed uPVC pipe, Access Mini-spin nozzles, drip-stop valves, downtubes (tunnels only). Entry 'Geka' hose fitting. Twin lines (3.0m/4.2m/4.5m widths are single line) include linkage pipework and on/off valves to each line. Fixings supplied: Wire strainers, straining wire and suspension straps (single line in tunnel has suspension straps to fix to ridge)

For 'Geka' hose tails see p15; Blanking plugs or shut off valves to blank off nozzles see p38


Tunnels

CNL Drippers

NETAFIM"

These 'state-of-the-art' drippers are designed for crops such as Strawberries where extremely high uniformity is required. The pressure compensated drippers also have a non-leakage device which 'locks' the dripper at the end of the cycle, preventing water drainage at the end of the cycle and the need to refill at the start of the next cycle.

| | HCNL | LCNL | |
|--------------------|------------------------------|---------------|--|
| Pressure Range: | 1.4 - 4.0 bar | 1.0 - 4.0 bar | |
| Max head sustained | 0.3 bar | 0.15 bar | |
| 4 way manifold: | 80cm black leads, 'S' stakes | | |



| Dripper only | | Pack of 25 | | Pack of 100 | |
|----------------|------|------------|---------|-------------|---------|
| Output | Туре | Code | Price £ | Code | Price £ |
| 4 l/h | LCNL | D4N-Q | 19.00 | D4N-H | 69.00 |
| 6 l/h | HCNL | D6N-Q | 19.00 | D6N-H | 69.00 |
| 8.5 l/h | LCNL | D8N-Q | 19.00 | D8N-H | 71.00 |
| 4-way manifold | | D8N4L-Q | 56.00 | D8N4L-H | 218.00 |
| Single outlet | | DNEA-Q | 9.30 | DNEA-H | 37.00 |

Netafim PCJ CNL Drippers

- · Labyrinth design with maximum filtration area
- · Continuously self cleaning dripper
- · Silicon injection moulded diaphragm


Drippers are available in two operating pressures, with the HCNL having a higher shut off pressure, making them better suited to sloping sites.

Available as dripper only, or with 50cm or 80cm lead and Prevo 'S' stake.

LCNL operating pressure: 0.7 - 4.0 bar HCNL operating pressure: 1.5 - 4.0 bar







Single dripper

Dripper with 80cm lead

| Dripper only | | Pack of 25 | | Pack of 100 | |
|--------------|------|------------|---------|-------------|---------|
| Output | Туре | Code | Price £ | Code | Price £ |
| 1.2 l/h | HCNL | D1PCH-Q | 9.00 | D1PCH-H | 34.00 |
| 2 l/h | HCNL | D2PCH-Q | 8.80 | D2PCH-H | 30.00 |
| 2 l/h | LCNL | D2PCJ-Q | 6.00 | D2PCJ-H | 21.00 |

| Dr | Dripper & Lead Pack of 25 | | Pack of 100 | | | |
|---------|---------------------------|--------|-------------|---------|----------|---------|
| Output | Туре | Length | Code | Price £ | Code | Price £ |
| 1.2 l/h | HCNL | 50cm | D1CNHA-Q | 12.00 | D1CNHA-H | 41.00 |
| 2 l/h | HCNL | 50cm | D2CNHA-Q | 12.00 | D2CNHA-H | 41.00 |
| 2 l/h | LCNL | 80cm | D2CNJA-Q | 12.00 | D2CNJA-H | 41.00 |

Dripper with Shut Off



Ideal where individual drippers need to be shut off. The dripper can either rest on the compost, or can be staked. Pressure Compensated CNL nozzle. Pre-assembled 2 l/h dripper, lead, nipple, cap.





| | Qty | Code | Price £ |
|----------|-----|----------|---------|
| Dripper/ | 25 | D2ENPA-Q | 23.00 |
| Lead/Cap | 100 | D2ENPA-H | 88.00 |
| Stake | 25 | DAP-Q | 5.60 |
| | 100 | DAP-H | 21.00 |

Punches



| Description | 3mm | Price £ |
|----------------------|-------|---------|
| Budget Hand Punch | DPB3 | 6.80 |
| Punch pliers 16/20mm | DPP3 | 17.00 |
| Punch pliers 25/32mm | DPPL3 | 19.00 |

Flexidrip Nozzles with Stake



The Access Flexidrip nozzle is joined to its stake with a unique 4-way universal joint, providing a strong, snag-free unit.

| Qty | Code | Price £ |
|-----|----------|---------|
| 25 | D2NSL-Q | 13.00 |
| 100 | D2NSL-H | 50.00 |
| 500 | D2NSL-5H | 236.00 |

Dripper Leads



5.0mm x 80cm leads can be cut to provide shorter lengths. Use DNIP adaptor to connect to lateral pine



| Length | Qty | Code | Price £ |
|--------|-----|--------|---------|
| 80cm | 25 | DL80-Q | 4.60 |
| 80cm | 100 | DL80-H | 16.00 |
| | 25 | DNIP-Q | 3.70 |
| | 100 | DNIP-H | 12.00 |

Ottima PC360

Needs leads.

Compensated dripper ideal for larger pots

The Ottima PC360 is a pressure compensated dripper making it ideal for larger pots and planters where more water is required. The Ottima sprays over a wider diameter than a traditional dripper, reducing water run-through on hanging baskets.

Watered area approx. 0.25m diameter.

Flow: 30 l/h. Pressure: 1.5 - 3.0 bar.

Connect onto a 16mm or 20mm supply pipe using small bore pipe - use P13-20M - see p27.

Requires 3mm punch - see p4; for a barbed connector into 16mm or 20mm pipe use DNIP - see above.

| Qty | Code | Price £ |
|-----|---------|---------|
| 10 | D0F30-T | 8.80 |
| 100 | DOF30-H | 81.00 |



Tree Watering Dripper



- · 8 l/h output for faster watering
- · Simply punch dripper into 20mm pipe
- · Pressure compensated


Netafim 8 I/h CNL dripper for precise, pressure compensated watering. Simply run a 20mm polythene pipe above the tree pots and punch in the dripper and fit the lead and anchorage stake.

| Qty | Code | Price £ |
|-----|--------|---------|
| 25 | D8TD-Q | 38.00 |
| 100 | D8TD-H | 147.00 |

Stock Bed Watering

This low cost watering system is ideal for watering large areas economically. Each stake set includes a riser pipe, fittings, sprinkler and straps to fit to the customers own stake (25mm square is ideal).

The medium kit will water an area up to 100m² (25m x 4m).

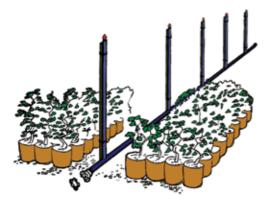



What you get:

- · 10 risers 1.2m high
- · Sprinklers (3 sets in medium kit) · 50m of 20mm pipe
- · Fittings for end or centre feed
- · 'Geka' entry connector



Covers up to 100m²

| Code | Price £ |
|------|---------|
| SKDC | 116.00 |

| Nozzles | KE070 | KES070 | KES120 |
|------------|-------|--------|--------|
| Bed width | 2m | 3m | 4m |
| Max length | 18m | 25m | 25m |

T-tape

One of the most popular drip tapes available in the UK, T-tape is ideal for larger scale field crops.


| Tape Marking | Wall thickness | Dripper spacing | Output I/h per 100m | Reel Length | Code ~ | Price £ |
|-----------------|-------------------|--------------------|------------------------|----------------|----------|---------|
| TOV FOO | W 500 450 : | 20cm | 250 l/h | 3048m | TT06-250 | 274.00 |
| TSX 506 | 150 micron | 20cm | 500 l/h | 3048m | TT06-500 | 274.00 |
| TSX 510 | 250 micron | 20cm | 500 l/h | 1829m | TT10-500 | 241.00 |

| Fittings: | Code | Price £ |
|----------------|----------|---------|
| ¾" BSPM | TTK16-3 | 0.60 |
| 16mm poly pipe | TTK16-16 | 0.50 |
| Joiner | TT16J | 0.40 |





TTK16-16

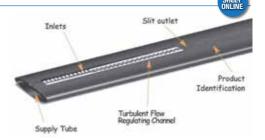




~ see p52

TTK16-3

T-tape for Glasshouses



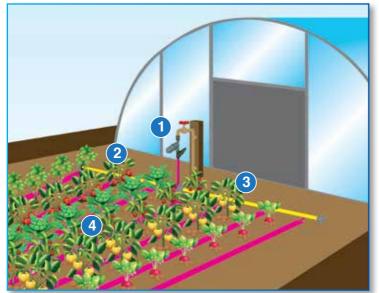

Line spacing

Capillary beds

0.3 - 0.7 bar

Designed for row crops in tunnels each dripper is just 20cm apart. This low cost, thin wall system is ideal for flower crops and vegetable production.

Select the parts you need in 4 easy steps:

- Buy one starter pack per system.
- Buy one header pack per bed. Add up the width of all the beds - you will need this much 16mm header pipe.
- Total up how many runs you will have - you will need one entry fitting per row
- Multiply the number or rows you have by their length to give the total meterage of T-tape you need.

Pipe Headers

Maximum length on 0% slope

Starter pack

Output @ 0.55 bar

Operating Pres.

Contains filter, pressure regulator and punch. Includes both 'geka' and snap connectors. Can be fitted to the outlet of a 1/2" tap (this has a 3/4" thread) or can be put in the hose line. Includes a budget hand pump.

2 Header pack

Contains fittings to create a centre fed header, with 'geka' and snap connectors (p17). Does not include header pipe - use 16mm pipe. This will allow up to 400m of T-Tape to be used per bed.

| Description | Code | Price £ |
|------------------------|----------|---------|
| Starter Pack | LHPSP | 55.00 |
| Header Pack | LHPC16 | 12.00 |
| 16mm x 25m header pipe | PA16-25M | 18.00 |

| Qty | Code | Price £ |
|-----|---------|---------|
| 10 | TTE16-T | 6.20 |
| 100 | TTE16-H | 53.00 |

Entry Fittings

0.6m

0.3-0.45m or one per row

One entry fitting required per run. Requires 4mm hole to be punched into the side wall of the header pipe.



T-tape for Glasshouses



16mm T-tape with 20cm dripper spacing.

| | Reel Size | Wall Thickness | Code | Price £ |
|---|-----------|----------------|------------|---------|
| | 375m | 250 micron | TT10-500-S | 112.00 |
| Г | 675m | 150 micron | TT06-500-S | 112.00 |

Punch






| 4mm | Code | Price £ |
|----------------------|------|---------|
| Budget Hand Punch | DPB4 | 7.80 |
| Punch Pliers 16/20mm | DPP4 | 11.00 |



Mist propagation produces high success rates, even with difficult specimens. Also provide bottom heat - cool tops and warm bottoms produce the best results!

Mist Wean Controller





- · Wean function built-in
- · Easy to programme

The controller features 3 easy to use dials. The 'valve on' dial allows the burst length to be set. The 'delay' dial can either be set to 'off', in which case the mist will burst every time the wet leaf dries out, or it can be set to a minimum delay to allow for weaning. Finally the 'sensitivity' dial adjusts the sensitivity of the wet leaf.

Complete with 2.5m wet leaf, mains plug and cable and solenoid cable.

| Code | Price £ |
|--------|---------|
| MAMWCL | 218.00 |


Polyphosphate filter available for hard water areas (page 9)

For larger units, Heron panels with multiple wet leaf interfaces are available. Contact our Sales Department.

Overhead Kit - Single Bench







With Mist Controller, wet leaf, solenoid, wire, wire strainer,

support straps, glue and fittings as shown. Bench not included.

| Length (m) | 1m wide bench | Price £ |
|-----------------|------------------|---------|
| 1 | MA1H1 | 297.00 |
| 2 | MA1H2 | 324.00 |
| 3 | MA1H3 | 353.00 |
| 4 | MA1H4 | 385.00 |
| 5 | MA1H5 | 415.00 |
| 6 | MA1H6 | 446.00 |
| 7 | MA1H7 | 476.00 |
| 8 | MA1H8 | 505.00 |
| 9 | MA1H9 | 536.00 |
| 10 | MA1H10 | 566.00 |
| Extra 1m run | MNH1.0M | 33.00 |

| Length (m) | 1.5m wide bench | Price £ |
|--------------------|--------------------|---------|
| 1.25 | MA2H1 | 295.00 |
| 2.50 | MA2H2 | 325.00 |
| 3.75 | MA2H3 | 356.00 |
| 5.0 | MA2H4 | 389.00 |
| 6.25 | MA2H5 | 416.00 |
| 7.5 | MA2H6 | 447.00 |
| 8.75 | MA2H7 | 478.00 |
| 10 | MA2H8 | 508.00 |
| 11.25 | МА2Н9 | 539.00 |
| 12.5 | MA2H10 | 570.00 |
| Extra 1.25m run | MNH1.25M | 33.00 |

With Mist Controller, wet leaf, solenoid, glue and fittings as shown. Bench not included.

| Length (m) | 1m wide bench | Price £ |
|-----------------|------------------|---------|
| 1 | MA1V1 | 277.00 |
| 2 | MA1V2 | 300.00 |
| 3 | MA1V3 | 322.00 |
| 4 | MA1V4 | 343.00 |
| 5 | MA1V5 | 363.00 |
| 6 | MA1V6 | 386.00 |
| 7 | MA1V7 | 407.00 |
| 8 | MA1V8 | 428.00 |
| 9 | MA1V9 | 450.00 |
| 10 | MA1V10 | 477.00 |
| Extra 1m run | MNV1.0M | 25.00 |

| Length (m) | 1.5m wide bench | Price £ |
|--------------------|--------------------|---------|
| 1.25 | MA2V1 | 279.00 |
| 2.50 | MA2V2 | 300.00 |
| 3.75 | MA2V3 | 322.00 |
| 5.0 | MA2V4 | 343.00 |
| 6.25 | MA2V5 | 364.00 |
| 7.5 | MA2V6 | 386.00 |
| 8.75 | MA2V7 | 407.00 |
| 10 | MA2V8 | 428.00 |
| 11.25 | MA2V9 | 450.00 |
| 12.5 | MA2V10 | 471.00 |
| Extra 1.25m run | MNV1.25M | 25.00 |

Polyphosphate Descaler



- · Simple Cartridge based system
- · Mounting bracket and spanner included
- · Easy Installation

How it Works

In 'hard water' areas Calcium precipitates out of the water supply causing scale build up on pipe walls, dripper outlets and plant leaves. Traditionally Nitric acid dosing is used to sequester the calcium, requiring large quantities of acid.

The polyphosphate descaler uses small quantities of long chain polyphosphates (derived from phosphoric acid) to act as a 'crystal modifier'. By modifying the crystalline structure these compounds will not precipitate into scale and actually stay in solution. Over time already deposited mineral scale deposits will also dissolve.




| | Connection | Code~ | Price £ |
|-------------------------------|------------|--------|---------|
| Polyphosphate Descaler | 1" F | EFBP | 114.00 |
| Spare Polyphosphate cartridge | | EFBP-C | 50.00 |
| 5 micron sediment pre-filter | 1" F | EFBS | 106.00 |
| Spare sediment cartridge | | EFBS-C | 42.00 |

Wet Leaf



Access Solenoid Valves 24V AC









- · Rating: 3.8W
- · Pressure range: 0.5-10 bar
- · ¾" BSPM inlet/outlet
- · Fibreglass polyamide body
- · 2 mounting pillars for self-tapping screws
- · Inlet strainer

| Install vertically, h | orizontally |
|-----------------------|-------------|
| but not up-side-a | |
| con not of siers | 10.11.1 |

| Code | Price £ |
|-------|---------|
| ESVA3 | 20.00 |

Amber Mist Nozzle



| Output at | | Recomr bed v | | 1/2" BSPM | | |
|--------------|-------|-----------------|----------|-----------|---------|--|
| 3.5 bar Size | | Risers ▲ | Tunnel ▼ | Code | Price £ | |
| 25 l/h | 0.6mm | 1.0m | 1.0m | MA2-24 | 15.00 | |
| 46 l/h | 0.8mm | 1.5m | 1.5m | MA2-32 | 15.00 | |
| | | MAA | 10.00 | | | |

This nozzle has a 1/2" BSPM thread. Ideal pressure 3.5 bar. For a low pressure option, use Mini-mist nozzles p10.

| • | Stainless | steel | iet | and | anvil | |
|---|-----------|-------|-----|-----|-------|--|

- · Anti-drip option for upside-down use
- · Glass filled nylon frame





The sprinkler nozzle is the most important part of your system, so we only use top quality nozzles. Unlike old fashioned nozzles, our modern sprinklers have been designed to provide optimum distribution, while keeping precipitation rates low to prevent crop and compost damage.

Half Circle This nozzle uses the Eindor taper system, see p38. Ideal working pressure 2-3 bar.



| Output | | Bed with Risers ▲ | Sprinkler Spacing | Pack of 10 | | Pack of 10 | | Pack of 100 | |
|--------|--------|----------------------|----------------------|------------|---------|------------|---------|-------------|--|
| 2 bar | Colour | IIIddid A | opuonig | Code | Price £ | Code | Price £ | | |
| 40 l/h | Blue | 1.0m | 1.0m | KEASH40-T | 5.80 | KEASH40-H | 52.00 | | |
| 70 l/h | Black | 1.3m | 1.5m | KEASH70-T | 5.80 | KEASH70-H | 52.00 | | |
| 90 l/h | Green | 2.0m | 2.0m | KEASH90-T | 5.80 | KEASH90-H | 52.00 | | |

- · Fine spray in half circle
- Low cost
- Ideal for narrow display benches

| | | | Effecti | ve ran | ge (m) | 1 | | |
|---|---|---|---------|--------|--------|---|---|---|
| | | Т | Т | Т | Т | Т | Т | 7 |
| | | | ᆚ | | | ᆚ | ᆚ | _ |
| 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |

Mini-mist This nozzle uses the Eindor taper system, see p38. Ideal pressure 2-4 bar.



| Output at | | Bed with Risers ▲ | Sprinkler Spacing | Pack of 10 | | Pack of 100 | |
|--------------|--------|----------------------|----------------------|------------|---------|-------------|---------|
| 2 bar | Colour | IIISOIS Z | Optioning | Code | Price £ | Code | Price £ |
| 20 l/h | Green | 1.0m | 1.0m | KEAF020-T | 5.90 | KEAF020-H | 45.00 |

- · 50-150 micron droplets
- · Low cost propagation
- · Ideal for cooling



Vibro-spin This nozzle uses the Eindor taper system, see p38. Ideal working pressure 2 bar.



| Output at | | Bed with Risers ▲ | Sprinkler | Pack of 10 | | Sprinkler Pack of 10 Pack of 100 Spacing | | 100 |
|--------------|--------|----------------------|-----------|------------|---------|--|---------|-----|
| 2 bar | Colour | IIIddia Z | Code | | Price £ | Code | Price £ | |
| 60 l/h | Grey | 1.5m | 1.5m | KE060-T | 5.40 | KE060-H | 39.00 | |
| 70 l/h | Black | 2.0m | 1.8m | KE070-T | 5.40 | КЕ070-Н | 39.00 | |
| 105 l/h | Blue | 2.5m | 2.0m | KE105-T | 5.40 | KE105-H | 39.00 | |

- Self cleaning nozzle
- · Rotating anvil evens
- distribution
- · Ideal for plug plants




Mini-spin This nozzle uses the Eindor taper system, see p38. Ideal working pressure 2 bar.





| Output at | | Bed with Risers ▲ | Sprinkler Spacing | Pack of | f 10 | Pack of | 100 |
|--------------|--------|----------------------|----------------------|----------|---------|----------|---------|
| 2 bar | Colour | 1113013 | Optioning | Code | Price £ | Code | Price £ |
| 40 l/h | Silver | 2.2m | 2.0m | KES040-T | 8.70 | KES040-H | 77.00 |
| 70 l/h | Black | 3.0m | 2.5m | KES070-T | 8.70 | KES070-H | 77.00 |
| 105 l/h | Blue | 3.2m | 2.5m | KES105-T | 8.70 | KES105-H | 77.00 |
| 120 l/h | Red | 4.0m | 3.0m | KES120-T | 8.70 | KES120-H | 77.00 |

- Twin water jets
- · Low water consumption
- · Ideal for windy sites




Mini-spin Tunnel This nozzle uses the Eindor taper system, see p38. Ideal working pressure 2 bar.





| Output at | | Bed with Risers ▼ | Sprinkler Spacing | Pack of 10 | | Pack of | 100 |
|--------------|--------|----------------------|----------------------|------------|---------|-----------|---------|
| 2 bar | Colour | 1113013 | Орионія | Code | Price £ | Code | Price £ |
| 70 l/h | Black | 5.0m | 2.5m | KESU070-T | 7.80 | KESU070-H | 68.00 |
| 105 l/h | Blue | 5.2m | 2.5m | KESU105-T | 7.80 | KESU105-H | 68.00 |
| 120 l/h | Red | 5.5m | 2.5m | KESU120-T | 7.80 | KESU120-H | 68.00 |
| 160 l/h | Brown | 5.7m | 2.5m | KESU160-T | 7.80 | KESU160-H | 68.00 |

- Designed for upside-down use
- Low water consumptionIdeal for tunnel watering



Tall Bedding Spike Set





Designed for taller borders, the 1m galvanised steel rods can be pushed into the ground to give a nozzle height of 70 - 80cm.

- · 1m small bore connecting pipe.
- · Top fitting accepts Eindor taper fittings
- Barbed plunger for polythene pipe requires 3mm punch - see p4.

| Qty | Code | Price £ |
|-----|--------|---------|
| 10 | KRGV-T | 53.00 |
| 100 | KRGV-H | 366.00 |

Bedding Spike



Stake Riser

- · Low cost
- · Secures to customers own stake - includes straps
- · Top fitting accepts Eindor taper nozzles
- · Base has barbed plunger for polythene pipe



| | Qty | Height | Code | Price £ |
|---|-----|--------|--------|---------|
| _ | 10 | 1.2m | KRSR-T | 37.00 |
| | 100 | | KRSR-H | 302.00 |

Spiked Riser

- Use on grass or soil
- · Connect hose with 'Geka' hosetails or plastic Quick Connector
- · 3/4" BSPM sprinkler fitting
- Includes adaptor for Eindor taper nozzles



| | Height | Code | Price £ |
|-----------------|--------|----------|---------|
| 'Geka' fittings | 0.7m | KRST0.5 | 24.00 |
| QC inlet | 0.7m | KRST0.5Q | 15.00 |

Small Shrub Head This nozzle has a 1/2" BSPF thread. Ideal pressure 2.8 bar



| Output | Material | Maximum radius | Code | Price £ |
|----------------|----------|----------------|----------|---------|
| 150 - 1200 l/h | Plastic | 4.6 - 11.3m | KHPGJ-SH | 16.00 |

Adjustable Arc

| Output | | | | | | |
|--------|-------|------|------|--|--|--|
| Nozzle | m³/hr | | | | | |
| 0.75 | 2.8 | 4.9 | 0.17 | | | |
| 1.0 | 2.8 | 5.8 | 0.23 | | | |
| 1.5 | 2.8 | 6.7 | 0.34 | | | |
| 2.0 | 2.8 | 7.6 | 0.45 | | | |
| 2.5 | 2.8 | 8.5 | 0.57 | | | |
| 3.0 | 2.8 | 9.4 | 0.68 | | | |
| 4.0 | 2.8 | 10.4 | 0.91 | | | |
| 5.0 | 2.8 | 11.3 | 1.14 | | | |

Large Shrub Head This nozzle has a 3/4" BSPF thread. Ideal pressure 2.0 - 4.0 bar



| Output | Material | Maximum radius | Code | Price £ |
|----------------|----------|-------------------|-------|---------|
| 110 - 3270 l/h | Plastic | 8.5 - 15.8m | KHPGS | 16.00 |

Adjustable Arc

| Output @ 3.5 bar | | | | | | |
|---------------------|-------|------|--|--|--|--|
| Nozzle Radius m³/hr | | | | | | |
| 1.5 | 9.8m | 0.38 | | | | |
| 2.0 | 10.4m | 0.47 | | | | |
| 2.5 | 10.7m | 0.58 | | | | |
| 3.0 | 11.9m | 0.74 | | | | |
| 4.0 | 12.2m | 0.97 | | | | |
| 5.0 | 12.8m | 1.24 | | | | |
| 6.0 | 13.1m | 1.47 | | | | |
| 8.0 | 13.7m | 1.95 | | | | |









This nozzle has a 1/2" BSPF thread

- · Low precipitation rate
- · Turbo hammer operation
- · Low cost

| | Blue | Brown |
|----------------|-------------|-------------|
| | 4 x 4 | 6 x 6 |
| | 4 x 6 | 6 x 8 |
| Spacing (m) | 6 x 6 | 8 x 8 |
| | 6 x 8* | 8 x 10* |
| | 8 x 8* | 10 x 10* |
| Output @ 2 bar | 180 l/h | 275 l/h |
| Pressure Range | 1.5 - 3 bar | 1.5 - 3 bar |
| Diameter | 14.5 - 15m | 12 - 14m |
| Code | KN5-200 | KN5-300 |
| Price £ | 8.30 | 6.90 |

Naan 5022U





- · Low precipitation rate
- · Wide spacings
- · Unique nozzle design for higher uniformity

This nozzle has a 1/2" BSPM thread





Naan Adjustable





- Plastic or metal body
- · Part or full circle
- · Adjustable height and range
- · Diffuser pin

| | Plastic | Plastic | Metal |
|------------------|-------------|-------------|-------------|
| | 8 x 10 | 8 x 10 | 8 x 10 |
| Spacing (m) | 10 x 10 | 10 x 10 | 10 x 10 |
| | | 10 x 12* | 10 x 12* |
| | | 12 x 12* | 12 x 12* |
| Output @ 2.5 bar | 450 l/h | 850 l/h | 850 l/h |
| Pressure Range | 1.5 - 4 bar | 1.5 - 4 bar | 1.5 - 4 bar |
| Diameter | 21 - 24m | 21 - 26m | 23 - 28m |
| Code | KNPC-500 | KNPC-940 | KNPCM-940 |
| Price £ | 9.80 | 9.80 | 19.00 |
| | | | 1 |

*at higher pressure

Adaptors











| Adaptor | Riser | Sprinkler | Code | Price £ |
|---------|-----------|-----------|---------|---------|
| Α | 3/4" BSPM | 1/2" BSPF | FPTI2-3 | 0.70 |
| В | 1/2" BSPM | 1/2" BSPM | FPTS2 | 0.60 |
| C | 3/4" BSPM | 1/2" BSPM | FPTS3-2 | 1.00 |









- · Use on grass or soil
- · Includes 'Geka' fittings
- · Connect hose with 'Geka' hose tails
- · 1/2" BSPM thread
- · Available with or without nozzle



| Nozzle | Height | Code | Price £ |
|----------|--------|--------|---------|
| _ | 1.06M | KRLS | 46.00 |
| Naan 501 | 1.06M | KRLS-N | 52.00 |

Heavy Duty



Cross Base Riser





- · Connect hose with 'Geka' hose tails
 - · 1/2" BSPM thread
 - · Available with or without nozzle



| Nozzle | Height | Code | Price £ |
|----------|--------|--------|---------|
| _ | 1.06M | KRLX | 45.00 |
| Naan 501 | 1.06M | KRLX-N | 50.00 |

Heavy Duty



Sled Riser

- · Use on concrete or soil
- · Includes 'Geka' fittings
- · Connect hose with 'Geka' hose tails
- · ¾" BSPM thread
- · Available with or without nozzle



| Nozzle | Height | Code | Price £ |
|----------|--------|--------|---------|
| _ | 0.36m | KRDT | 49.00 |
| Naan 501 | 0.36m | KRDT-N | 55.00 |

Spike with Sprinkler



- Metal spike for turf watering with 1/2" BSPF top thread
- Snap connector fitting
- Can be 'daisy chained'
- Available with or without sprinkler nozzle (6.4m radius)

| Nozzle | Code | Price £ |
|--------|--------|---------|
| _ | KR004 | 8.60 |
| RN200 | KRST2K | 21.00 |





Hand Watering

Crimped in threaded fitting

Professional Watering Lance

The best watering lance we have come across, this beautifully balanced US manufactured lance has a solid brass on/off valve with a smooth valve action. Now available as a 75cm lance for better reach. Low Flow rose (170AL) is ideal for domestic gardens.



Beautifully balanced

Soft foam handle

Solid brass valve with serviceable parts

> Super smooth solid brass valve arm

60cm Lance

| Rose | Fitting | Code | Price £ |
|-------|-------------|-------------|---------|
| 400AL | Quick Conn | ELANCE60DQ | 58.00 |
| 400AL | 'Geka' type | ELANCE60DG | 58.00 |
| 170AL | Quick Conn | ELANCE60DQS | 52.00 |

75cm Lance

| Rose | Fitting | Code | Price £ |
|-------|-------------|-------------|---------|
| 400AL | Quick Conn | ELANCE75DQ | 68.00 |
| 400AL | 'Geka' type | ELANCE75DG | 68.00 |
| 170AL | Quick Conn | ELANCE75DQS | 61.00 |

Professional Watering Roses



1, 400 Water Breaker 42 l/min @ 2.7 bar.



2. 170 Water Breaker 26 I/min @ 2.7 bar. Low Flow rose - ideal for domestic gardens.

3. Seedling nozzle with micro holes. Needs filter. 34 I/min @2.7 bar.

| No | Item | Code | Price £ |
|----|--------|-------|---------|
| 1 | 400AL | EHPRA | 24.00 |
| 2 | 170AL | EHPRB | 16.00 |
| 3 | 1000PL | EHPRC | 18.00 |
| | Filter | EHPRD | 23.00 |

Metal Spray Gun

- 8 function spray gun with brass quick connector.
- · Mist · Full · Cone
- · Shower · Angle
- · Flat · Soaker · Jet

Protect from frost



| | Code | Price £ |
|-----------------|-------|---------|
| Metal spray gun | EHGUN | 21.00 |


Geka "Softrain" Lance

Comes complete with metal valve and large alloy rose with 'Geka' fitting.



To use with hose Quick Connectors, replace the 'Geka' with an FQCBM3 (page 17)

Geka Watering Roses



| No. | Rose | Code | Price £ |
|-----|-----------------|--------|---------|
| 1 | Large Alloy | EHRAR | 11.00 |
| 2 | Small Alloy | EHRAS | 16.00 |
| 3 | Spare Metal Tap | EVL3MF | 9.70 |





Tricoflex Hose



- Outer layer is both U.V. and abrasion resistant
- Yellow colour for easy visability
- 3 Knitted reinforcement combines pressure resistance with excellent handling characteristics
- Multi-layer construction ensures superb kink resistance
- Smooth inner layer ensures optimum water flow and restricts algae growth.



| Size | 25m C | oil | 50m C | oil | 100m C | oil |
|------|----------|---------|----------|---------|-----------|---------|
| ID | Code | Price £ | Code | Price £ | Code | Price £ |
| 1/2" | PHT2-25M | 38.00 | PHT2-50M | 75.00 | PHT2-100M | 149.00 |
| 3/4" | PHT3-25M | 64.00 | PHT3-50M | 129.00 | PHT3-100M | 258.00 |
| 1" | PHT4-25M | 103.00 | PHT4-50M | 204.00 | PHT4-100M | 411.00 |

Brass Hose Couplers



Hose couplers allow the permanent connection of hosepipe onto threaded fittings. Requires a hose clip. Female fitting includes leather seal.

| Hose-Thread | Code | Price £ |
|------------------|---------|---------|
| 34" - 1" Male | FHB3-4 | 7.60 |
| 1" - 1"Male | FHB4-4 | 8.60 |
| 34" - 34" Female | FHB3-3F | 3.70 |
| 3/4" - 1" Female | FHB3-4F | 7.90 |
| 1" - 1" Female | FHB4-4F | 5.00 |

'Geka' Type Hose Fittings Uncouples with a ¼ turn. Allows different size hoses to be joined.



Male BSPM



| Qty | Code | Price £ |
|------|-------|---------|
| 1/2" | FGBM2 | 3.00 |
| 3/4" | FGBM3 | 3.20 |
| 1" | FGBM4 | 3.40 |

Female BSPM



7/8" to fit outlet of 3/4" Bib tap ETB3

| Qty | Code | Price £ |
|------|--------|---------|
| 1/2" | FGBF2 | 3.10 |
| 3/4" | FGBF3 | 3.10 |
| 7/8" | FGBF78 | 9.80 |
| 1" | FGBF4 | 3.20 |

Hosetail

The easy fit 'Geka' on p22 saves scraping your knuckles on a hose clip!

| Qty | Code | Price £ |
|------|-------|---------|
| 1/2" | FGBH2 | 3.10 |
| 3/4" | FGBH3 | 3.30 |
| 1" | FGBH4 | 4.00 |

Spare Seals

Pack of 10 in re-sealable bag



| Price £ |
|---------|
| 4.80 |
| |

Blanking Cap



| Code | Price £ |
|-------|---------|
| FGBSE | 3.20 |



| Code | Price £ | |
|------|---------|--|
| FGBY | 16.00 | |

Hose Clips




Zinc plated. Genuine Jubilee hose clips - beware of cheap imitations!

| Range | Hose Size | Code | Price £ |
|---------|-------------|------|---------|
| 13-20mm | 1/2" | FHC2 | 1.00 |
| 17-25mm | 3/4" | FHC3 | 1.10 |
| 25-35mm | 1" | FHC4 | 1.20 |
| 35-50mm | 11/4"-11/2" | FHC6 | 1.30 |
| 50-70mm | 2" | FHC8 | 1.50 |

~ see p52

Hose Trolleys




Bolted steel frame with solid tyres. Light duty - ideal for gardens.



Welded steel frame with solid tyres. Medium duty - not suitable for sports use.



Welded steel frame with pneumatic tyres. Heavy duty - ideal for sports and nursery use.





| Ca | Capacity (m) | | Connector | Codo | Price £ |
|------|--------------------------|---|---|--|--------------------------|
| 1/2" | 3/4" | 1" | COMMECTOR | Coue ~ | FIICE E |
| 100 | | | QC | EHRC2 | 150.00 |
| | 50 | | ¾" hose | EHRC3 | 220.00 |
| | 80 | 45 | 'Geka' | EHRC4S | 409.00 |
| | 120 | 70 | 'Geka' | EHRC4 | 480.00 |
| | 150 | 100 | 'Geka' | EHRC4L | 555.00 |
| 50 | 40 | | 1/2" | EHRWS2 | 161.00 |
| 100 | 70 | | 1/2" | EHRWL2 | 213.00 |
| 50 | 40 | | 1/2" | EHRWSV | 193.00 |
| | 1/2" 100 50 100 | 12" 34" 100 50 80 120 150 40 100 70 | ½" ¾" 1" 100 50 80 45 120 70 150 100 50 40 100 70 | 12" 34" 1" Connector 1100 OC 3%" hose 60 45 Geka' 120 70 Geka' 150 100 Geka' 50 40 ½" ½" | 100 Connector Code ~ |

- 4 Welded steel frame
- 5 Welded steel frame with swivel arm

Hose Hanger

Keep your hose tidy with this heavy duty professional hose hanger

Has 3 fixing holes to secure to the wall.

Takes 100m 1/2" hose or 50m 3/4" hose.







Manifolds

Top quality Italian fittings

2 Way Manifold



- Built in taps · Teflon seals
- · Protect from frost



| | Code | Price £ |
|-----------------|-------|---------|
| 34"M threads | ET2M3 | 29.00 |
| Quick connector | ET2MQ | 24.00 |

3 Way Manifold



- Built in taps, 34"M threaded outlet.
- Teflon seals
- Protect from frost

| Screws | onto | sta | ndar | d ou | ıtside | |
|--------|-------|-----|------|------|--------|--|
| taps t | o giv | e 2 | or 3 | out | lets | |

| Code | Price £ |
|-------|---------|
| ET3M3 | 43.00 |

Brass Quick Connectors Compatible with plastic systems

Tap Connector



34" F for 1/2" tap.

| Code | Price £ |
|--------|---------|
| FQCBT3 | 3.30 |

Male Adaptor



1/2" or 3/4" male thread.

| | Code | Price £ |
|------|--------|---------|
| 1/2" | FQCBM2 | 3.30 |
| 3/4" | FQCBM3 | 3.30 |

3/4" Male Adaptor



Connector with 34" male thread. Snaps on to Tap connector etc.

| | Code | Price £ |
|------|--------|---------|
| 3/4" | FQCBS3 | 9.60 |

Hose Connector



For 1/2" and 3/4" hose. Snaps on to Tap connector etc.

| | Coue | FIILE Z |
|------|--------|---------|
| 1/2" | FQCBH2 | 8.50 |
| 3/4" | FQCBH3 | 11.00 |
| | | |

Shut off Connector



For 1/2" hose. Shuts off when disconnected.

| | Code | Price £ |
|------|---------|---------|
| 1/2" | FQCBH2S | 11.00 |

Hose-Hose Connector



For 1/2" and ¾" hose. Joins 2 hoses.

| | Code Price £ | |
|------|--------------|------|
| 1/2" | FQCBJ2 | 7.20 |
| 3/4" | FQCBJ3 | 9.00 |

Revolving Elbow



34" female thread.

| Code | Price £ | |
|--------|---------|--|
| FQCBE3 | 11.00 | |

Easy-fit 'Geka' Hosetail



For 1/2" and 3/4" hose. Easier to fit than a traditional 'Geka' hosetail.

| | Code | Price £ |
|------|--------|---------|
| 1/2" | FQCBG2 | 8.20 |
| 3/4" | FQCBG3 | 9.10 |

Barbed Hose Connector



Allows permanent connection of 1/2" and 3/4" hoses - use Jubilee clip - page 15.

| Code | Price £ | |
|--------|---------|--|
| FQCBC3 | 13.00 | |

Hose Coupler



Joins 2 hose connectors.

| Code | Price £ |
|--------|---------|
| FQCBK3 | 4.00 |

Replacement Seals



Replaces male sealing ring. Pack of 10.

| Code | Price £ |
|---------|---------|
| FQCRS-T | 4.50 |

Here is a "snap on" / "snap off" system. We use tough brass quick release connectors, much tougher than domestic plastic fittings - and are fully compatible. It is easy to connect together and there are no "horrid" hose clips!



Irrigation is vital if plants are to establish quickly, especially when conditions are warm and dry. Irrigation also ensures newly planted specimens have a far better chance of survival, and that plants and lawns in high traffic areas are able to recover.

As well as the components and kits available in this section, Access produce a companion catalogue - the 'Landscape Pocket Guide' which includes sample irrigation designs for small to medium sized landscape projects.

For larger projects. Access also have an experienced design department.



Border Watering Kit





What you get:

- 10 sprinkler risers
- 50m pipe (20mm)
- Tap connector
- Fittings
- 10 large sprinklers
 - 10 medium sprinklers
- 10 half-circle nozzles





Keep precious plants watered even in hot, dry spells with this border sprinkler kit.

The system consists of a black pipe running the length of the border, with spiked risers fitted as required.

Each riser has a choice of nozzle to suit the border width. Branching tees and elbows are included. Connect to an outdoor tap or a garden hose. Simple to install. Needs punch, see p4.

| Code | Price £ |
|------|---------|
| SBW | 110.00 |

| Covers up | |
|---------------------|---|
| to 75m ² | |
| (25m x 3m wide |) |

| Nozzle | KES040 | KES070 | KEASH40 |
|-------------------|--------|--------|---------|
| Bed width | 2.0m | 3.0m | 1.0m |
| Sprinkler Spacing | 2.0m | 2.5m | 1.8m |

Small Border Watering Kit



For smaller gardens this kit will water an entire border with water efficient sprinklers.

The system consists of a black pipe running the length of the border with spiked risers fitted every 2m.

Branching tees and elbows are included. Connect to an outdoor tap or garden hose. Simple to install. Needs punch, see p4.

What you get:

- · 10 sprinkler risers · 25m pipe (16mm)
- · Tap connector
- · Fittings
- · Medium Sprinklers (KES040)

Covers up to 40m² (20m x 2m wide)

| Code | Price £ |
|-------|---------|
| SBW25 | 68.00 |


Components

| Installing large numbers of systems? Then buy in Bulk! | | | | | | |
|---|-----------|-------|-----------|--------|--|--|
| 10 Pack Price £ 100 Pack Price £ | | | | | | |
| Stake Sets | KRBS-T | 17.00 | KRBS-H | 120.00 | | |
| Stake only | KESL-T | 6.50 | KESL-H | 59.00 | | |
| Head only | KEH-T | 2.00 | KEH-H | 18.00 | | |
| 1m lead | L42-1.0-T | 8.90 | L42-1.0-H | 83.00 | | |
| Pipe Plunger | KEP-T | 1.80 | KEP-H | 12.00 | | |

For Pipe see page 40; for barbed fittings see page 41.

Alternative nozzles are available on page 10.

Border Spray Watering Kit

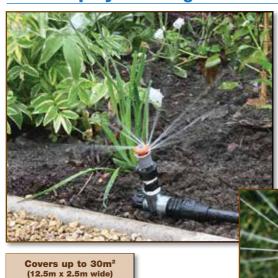



- · Simply installs at the front of the border
- Can be automated

Designed to water a border up to 3m deep from the front, the kit is ideal for more established borders. The system uses sprinklers on small metal spikes up to 3m apart. 16mm black polythene pipe runs along the front edge of the border.

The sprinkler nozzles provide a very fine spray, so delicate plants are not damaged.

Connects to a garden hose or a tap. Minimum pressure: 2.1 bar. Requires DB valve (p27) to comply with domestic water regulations.



What you get:

- 25m pipe (16mm)
- Tap connector
- Fittings
 - 4 sprinklers on metal spikes

Popup Border Spray Kit



- · Gentle spray on 300mm riser
- · No pipework visible
- · Can be automated

Designed to water a border up to 3m deep from the front, the system uses pop-up sprinklers that rise 300mm out of the ground when watering. A single trench along the front of the bed contains all of the pipe and the sprinklers, eliminating unsightly pipework on the bed.

The sprinkler nozzles provide a very fine spray, so delicate plants are not damaged.

Fits to a garden hose, a tap or an underground valve box (p23). Minimum pressure: 2.1 bar. Requires DB valve (p27) to comply with domestic water regulations.



| Code | Price £ |
|-------|---------|
| SBMP5 | 258.00 |

Covers up to 37m² (15m x 2.5m wide)

What you get:

- · 25m pipe (20mm)
- Tap connector
- Fittings
- · 5 sprinklers on 12" pop-up bodies



Border Drip Kit







Covers up to 60m²



| | Covers | Code | Price £ |
|-------|------------------|--------|---------|
| Small | 15m ² | SPBK25 | 46.00 |
| Large | 60m ² | SPBK | 135.00 |



| What you get: | | | | | |
|---------------|-------|----------------------|--|--|--|
| Small | Large | | | | |
| 25m | 100m | Drip Line | | | |
| 25 | 100 | Anchorage pegs | | | |
| 1 | 1 | Barbed fittings pack | | | |
| 1 | 1 | Inlet filter | | | |
| 1 | 1 | Hose connector | | | |
| 1 | 1 | Tap connector | | | |
| | | | | | |

Drip irrigation is the most efficient and unobtrusive way of watering beds, with water dripping directly into the soil. The drip line is brown to make it as unobtrusive as possible, although it can be covered with a mulch to make it invisible.

The Permadrip drip line is made from a thick walled polythene pipe with commercial grade pressure compensated drippers spaced every 0.5m for even coverage. Simple to install.

The kit can either be connected directly to an outdoor tap, or can be connected to a hose with a standard quick connector. Requires DB valve (p27) to comply with domestic water regulations.

Hedge Drip Kit



- Speed up establishment for faster screening
- · Reduces plant losses
- Can be automated

Using thick walled commercial grade dripline with drippers every 0.3m, this package is ideal for watering hedge lines to speed up establishment and reduce plant losses.

A single line of dripline is needed down each hedge run.

The kit can either be connected directly to an outdoor tap, or can be connected to a hose with a standard quick connector. Requires DB valve (p27) to comply with domestic water regulations.

Dripline Starter Pack

Allows dripline to be easily connected to an outside tap or to a hose using a snap connector. For beds supplied using underground pipe, the threaded fitting can be connected to a compression fitting. The kit also includes a stop end connector and a straight connector in case plain pipe (see p40) is being used to connect from the tap to the border







Small Large SHRK

| | what you get. | | |
|--------|---------------|-------|----------------|
| | Small | Large | |
| rice £ | 25m | 100m | Drip Line |
| 40.00 | 25 | 100 | Anchorage pegs |
| 27.00 | 1 | 1 | Inlet filter |
| | 1 | 1 | Hose connector |
| | - 1 | 1 | Tan connector |

Anchorage Pegs



Fit every 0.5 - 1.0m to hold the drip line down. Fits 16/20mm.

Sturdy barbed pegs for more grip

What were made

| Qty | Code | Price £ |
|-----|----------|---------|
| 25 | ESS16-Q | 12.00 |
| 100 | ESS16-H | 42.00 |
| 800 | ESS16-8H | 309.00 |

Permadrip Pro











Easy Installation

At last – a really simple dripper system

- · The most efficient way to water
- · Anti-siphon design resists clogging
- Brown to blend in
- · Pressure compensated ideal for long runs
- · Thick walled for durability





Connect up



Connect to tap







Your Questions Answered

How far apart do I space Permadrip?

Space runs 0.6m apart. Use the 0.3m spacing Permadrip for providing extra water around trees. Bending radius, 18cm.

How much do I need?

Work out the area of the beds (in m2) and double. This is how many metres of 0.5m spaced Permadrip you need.

How much can I use?

It depends on your water supply. Measure your supply in I/hr (see p37). Divide this by 3.2 for 0.5m spacing (5.3 for 0.3m spacing) this is how many metres you can run at a time.

What about Water Regulations?

For house gardens you can run Permadrip on the surface if you add a DB valve. See p27.

How long should I run it for?

Approximately 30 mins per day in dry weather or one hour three times a week.

Operating range: 0.8-3.5 bar Nozzle Output: 1.6 l/h Maximum length (0.5m): 165m Recommended Filter: 0.13mm

| Price £ | Code | Spacing | Length | |
|---------|-----------|---------|--------|---|
| 28.00 | TNT0.15-Q | 0.15m | 25m | |
| 106.00 | TNT0.15-H | 0.15m | 100m | ſ |
| 26.00 | TNT0.3-Q | 0.30m | 25m | |
| 88.00 | TNT0.3-H | 0.30m | 100m | |
| 24.00 | TNT0.5-Q | 0.50m | 25m | ſ |
| 83.00 | TNT0.5-H | 0.50m | 100m | Ī |



0.5m spacing for borders




0.3m spacing for hedge runs



0.15m spacing for green roofs and tree pits

Small Temporary Lawn Kit





- Temporary system for smaller lawns
- · Designed with professional sprinklers
- Easy to put out and take away

Using metal spiked risers for the lawn topped with professional quality sprinkler nozzles from Hunter and commercial grade 1/2" hose, this kit guickly and easily connects together to water the lawn, either during establishment or during hot, dry spells.

If the system is run for 4 hours at night it will gently put the equivalent of 1 weeks worth of rain down on the lawn - a timer will automate this.

Includes 3 risers with nozzles, 25m professional grade hose, quick connectors and tap fittings.

| Code | Price £ |
|-------|---------|
| SLMP3 | 174.00 |

What you get:

- · 3 sprinklers · 25m 1/2" hose
- Fittings
- · Tap connector



Temporary Lawn Watering Kit







Laid a new lawn?

Use this system to help it establish. Add an automatic controller for fully automatic operation.

Includes 3 risers, each with a sprinkler that covers 10m diameter, 25m of hose and all fittings required.

| Code | Price £ |
|------|---------|
| STLW | 288.00 |

Covers up to 250m² (25m x 10m wide)

What you get:

- 3 risers and sprinklers 25m 3/4" hose
- Fittings
- Tap connector

Lawn Watering Kit



SIZE KITS **ONLINE**

| Code | Price £ |
|------|---------|
| SLW3 | 107.00 |





What you get:

- 25m pipe (20mm)
- Tap connector
- Fittings
- · 3 pop-up sprinklers with interchangeable nozzles

Nothing looks better than a well watered lawn, and this pop-up sprinkler kit makes installation very easy.

3 pop-ups are included, each one can have its radius adjusted between 4.9m and 9.1m, and its arc adjusted between 40° and 360°, 25m of pipe and all fittings are included, as is a tap connector.

Note: Water Regulations require pop-up sprinklers in commercial premises to be protected by a break tank. For home gardens, check with your water supplier.

Underground Valve Boxes



For a neater installation, hide all of the control valves underground.

For warning label see page 44. 🖉

| | Battery | Price £ | Mains | Price £ |
|-----------|---------|---------|--------|---------|
| 2 zone | EPAV02 | 154.00 | EPAB02 | 120.00 |
| 4 zone | EPAV04 | 245.00 | EPAB04 | 174.00 |
| DB option | EPAVDB | 218.00 | EPABDB | 182.00 |

3 Simple Steps

1 Select Valve Chambers

Choose one or more valve boxes to bring water to the various areas of the garden. If you are having a battery powered controller, choose a battery valve box.

2 Choose Controller

Choose mains or battery powered controller to suit your needs.

3 Select Cable

If the controller is remote from the valve box, measure how much cable is needed to run from the controller location to the valve boxes.

Controller not included - see pages 28-29

Tap Link Kit for Valve Boxes

The kit consists of a 2-way brass manifold that screws onto the outdoor tap — allowing the tap to still be used for filling a watering can or connecting a hose. On the other outlet of the manifold 25m of underground pipe runs from the tap position to the valve box.

Tap and backplate are not included.


| Code | Price £ |
|-------|---------|
| STK20 | 73.00 |
| | |



Border Link Kit

The Border Link
Kit allows up to 4
separate beds to
linked back to either
a valve box or an
outside tap using
underground pipe.
The kit can supply
water to either border
drip kits or border
sprinkler kits. By

underground valve box.



linking the beds together underground the irrigation system becomes much less obtrusive and is easier to automate.

The kit consists of 25m of underground supply pipe, 4 take off points (one for each bed) and connections for either a standard garden tap or to an

Tap Manifold



A simple way of fitting manifolds to the tap, kits will suit battery operated controllers or mains powered controllers. Includes valves and link pipe but not tap or controller. DB valve option provides compliance with the Water Regulations for dripline in house gardens.

Inlet: ¾" F
Outlet: ¾"M or 1"F

Controller not included - see pages 28-29

| Controller Type | Zones | Code | Price £ |
|-----------------|----------|--------|---------|
| | 2 zone | EPAG02 | 117.00 |
| Battery | 4 zone | EPAG04 | 196.00 |
| | DB Valve | EPAGDB | 157.00 |
| | 2 zone | EPAT02 | 87.00 |
| Mains | 4 zone | EPAT04 | 136.00 |
| | DB Valve | EPATDB | 142.00 |

Rotator Sprinklers







 Matched Precipitation

- · NEW side strip
- · Water efficient



1/2" BSPF thread

| Code | Price £ |
|----------|--------------------------------------|
| KHPPR | 2.30 |
| KHPPRBX | 19.00 |
| КНРРН | 11.00 |
| КНРРНВХ | 77.00 |
| KHPPR-12 | 16.00 |
| | KHPPR KHPPRBX KHPPH KHPPHBX |

Water efficient sprinklers with 'matched precipitation' which allows different nozzles and arcs to be used on the same zone while maintaining uniformity. If there is sufficient flow and pressure, in 'home gardens' the sprinklers can be connected using a 'DB' valve (page 27).

The new 'Pro' body has a heavy duty spring, a check valve and 5 year warranty. The sprinkler is regulated to 2.8 bar pressure.

Hunter MP Rotator Nozzles

The original MP Rotator nozzle, manufactured by one of the leading sprinkler manufacturers in the world, this range offers unrivalled options in terms of arc and radius adjustment.


All stated radii can be reduced by up to 25% using the nozzle key.

| (III) | tas | 31 | Mi. | ř |
|-------|-----|----|-----|---|
| W | | | g, | |
| Ч | H | ı | ۳ | |
| | - | | | |
| | | | | |
| | | | | |

| Strip Sprinklers | | | | | | | | | |
|---|--------------------|--------|---------|--|--|--|--|--|--|
| Coverage | Nozzle @ | Code | Price £ | | | | | | |
| Between 1.2m x 3.7m | L/H Corner | KHMPLH | 9.40 | | | | | | |
| and 1.8m x 5.2m | R/H Corner | KHMPRH | 9.40 | | | | | | |
| Between 1.2m x 7.3m and 1.8m x 10.4m | Centre of one side | KHMPSS | 9.40 | | | | | | |

| Radius | (| Radius 2.8 bar | Code | Price £ | | |
|----------------|---|---|---|--|--------------------------------------|------------------------------|
| 1.8-2.7m | m 2.4m 100 l/h (180°) 90° - 210° Orange / Grey 180 l/h (360°) 360° Lime Green | | | | | 9.40 9.40 |
| 3.7-4.5m | 4.1m | 40 l/h (90°) 80 l/h (180°) 130 l/h (270°) 170 l/h (360°) | 45° - 105° 90° - 210° 210° - 270° 360° | Turquoise Maroon Lt. Blue Olive | KHMP1D KHMP1A KHMP1B KHMP1C | 9.40 9.40 9.40 9.40 |
| 5.2-6.4m | 5.8m | 170 l/h (180°) 250 l/h (270°) 330 l/h (360°) | 50 l/h (270°) 210° - 270° Green | | KHMP2A KHMP2B KHMP2C | 9.40 9.40 9.40 |
| 7.6 - 9.1m | 9.1m 9.1m 410 l/h (180°) 90° - 210° Blue 620 l/h (270°) 210° - 270° Yellow 830 l/h (360°) 360° Grey | | Yellow | KHMP3A KHMP3B KHMP3C | 9.40 9.40 9.40 | |
| 10.1-10.7m | 10.7m | 650 l/h (180°) | 90° - 210° | Light Brown | KHMP4A | 9.40 |
| Threaded femal | e adaptor | to ½" BSPM thread | 1 | | KHMPAD | 2.70 |
| Oper | ating pres | sure: 1.7 bar-3.8 b | oar. Largest radi | i are achieved at | max pressure | |

Nozzle Adjustment Key



| - Charles | - | | |
|-----------|---|---|--|
| SEE | | | |
| | | | |
| | | - | |

| Code | Price £ |
|-------|---------|
| KHKMP | 2.00 |

Pop-up Sprinklers Hunter pop-ups are renowned for their quality and reliability.



| | Valve | stop | Drive | Ĭ | - 1 | ĩ | - 1 | - Ĺ | - 1 | ĭ | - 1 | ĭ | - 1 | ĭ | - 1 | ĩ | -1 | ï | - 1 | ĭ | - 1 | ĭ | - 1 | Ĭ | - 1 | ī |
|-----|-------|------|-------|---|-----|---|-----|-----|-----|---|-----|---|-----|---|-----|---|----|---|-----|---|-----|---|-----|---|-----|---|
| MP | | | | | | | | | | | | | | | | | | | | | | | | | | 7 |
| PGJ | | | ~ | | | | | | | | | | | | | | | | | | | | | | | 7 |
| 120 | ~ | ~ | ~ | | | | | | | | | | | | | | | | | | | | | | | |
| 125 | ~ | ~ | ~ | | | | | | | | | | | | | | | | | | | | | | | |

PGJ



This economically priced 'baby' version of the PGP sprinkler is ideal for mid-sized grass areas.

- · Easy nozzle changing
- · Waters more economically than sprays
- Slim design
- · Adjustable arc 40° 360°

1/2" BSPF thread

| Price £ | Code | |
|---------|---------|-------------|
| 13.00 | KHPGJ | 4" body |
| 97.00 | KHPGJBX | Box of 10 |
| 2.00 | KHPGJC | Check Valve |
| | KHPGJC | Check Valve |

Large sports sprinklers available (page 48)

| Nozzle | Bars | Radius | m³/hr |
|--------|------|--------|-------|
| 0.75 | 2.0 | 4.6m | 0.14 |
| 1.0 | 2.0 | 5.5m | 0.19 |
| 1.5 | 2.0 | 6.4m | 0.29 |
| 2.0 | 2.0 | 7.3m | 0.37 |
| 2.5 | 2.0 | 8.2m | 0.49 |
| 3.0 | 2.0 | 9.1m | 0.56 |
| 4.0 | 2.0 | 10.1m | 0.83 |
| 5.0 | 2.0 | 11.0m | 1.06 |

PGP Ultra Each sprinkler comes with a set of standard and low angle nozzles



The world's best selling rotor just got better, with a range of new features.

- · Vandal-proof drive mechanism
- · Thicker, safer top cover
- · Slotted screw for easy adjustment · Adjustable arc 50° 360°

34" BSPF thread

| W | Code | Price £ |
|----------------------|---------|---------|
| 4" sprinkler body | KHPGP | 15.00 |
| Box of 10 sprinklers | KHPGPBX | 110.00 |
| Short radius nozzles | KHP-NSR | 1.00 |
| Check Valve (3m) | KHPGPC | 2.00 |

| Low Angle Nozzles @ 2.5 bar | | | |
|-----------------------------|------|------|--|
| Nozzle Radius m³/hr | | | |
| 2.0LA | 7.9m | 0.40 | |
| 2.5LA | 8.8m | 0.53 | |
| 3.5LA | 9.1m | 0.68 | |
| 4.5LA | 9.1m | 0.84 | |

| | | | ı |
|--------------------------------|------|------|---|
| Short Radius Nozzles @ 2.5 bar | | | |
| Nozzle Radius m³/hr | | | |
| .50SR | 5.2m | 0.09 | |
| 1.0SR | 5.2m | 0.17 | |
| 2.0SR | 5.2m | 0.36 | |
| .75SR | 7.0m | 0.15 | |
| 1.5SR | 7.0m | 0.28 | |
| 3.0SR | 7.0m | 0.60 | |

3 Year Guarantee

| Standard Nozzles @ 2.5 bar | | |
|----------------------------|--------|-------|
| Nozzle | Radius | m³/hr |
| 1.5 | 9.4m | 0.32 |
| 2.0 | 10.1m | 0.39 |
| 2.5 | 10.7m | 0.48 |
| 3.0 | 11.0m | 0.61 |
| 4.0 | 11.9m | 0.81 |
| 5.0 | 11.9m | 1.02 |
| 6.0 | 12.2m | 1.22 |
| 8.0 | 12.5m | 1.63 |

120 Ultra Each sprinkler comes with a set of standard and low angle nozzles



The I20 is the professional version of the Hunter PGP. In addition to the features of the PGP, the I20 has:

- · FloStop control for individual nozzle shut-off
- · Check valve to prevent puddling
- · Heavy duty construction with stainless steel riser

34" BSPF thread

| | Code | Price £ |
|----------------------|---------|---------|
| 4" sprinkler body | KHP20 | 32.00 |
| Box of 10 sprinklers | KHP20BX | 248.00 |
| Short radius nozzles | KHP-NSR | 1.00 |

| Low Angle Nozzles @ 3.5 bar | | | |
|-----------------------------|--------|-------|--|
| Nozzle | Radius | m³/hr | |
| 2.0LA | 8.5m | 0.48 | |
| 2.5LA | 10.1m | 0.64 | |
| 3.5LA | 10.7m | 0.80 | |
| 4.5LA | 10.7m | 1.00 | |

| 5 Year Guarantee | | | |
|--------------------------------|------|------|--|
| Short Radius Nozzles @ 3.5 bar | | | |
| Nozzle Radius m³/hr | | | |
| .50SR | 5.5m | 0.12 | |
| 1.0SR | 5.5m | 0.23 | |
| 2.0SR | 5.5m | 0.45 | |
| .75SR | 7.6m | 0.17 | |
| 1.5SR | 7.6m | 0.34 | |
| 3.0SR | 7.6m | 0.67 | |

| Standard Nozzies @ 3.5 bar | | |
|----------------------------|--------|-------|
| Nozzle | Radius | m³/hr |
| 1.5 | 9.8m | 0.38 |
| 2.0 | 10.4m | 0.47 |
| 2.5 | 10.7m | 0.58 |
| 3.0 | 11.9m | 0.74 |
| 4.0 | 12.2m | 0.97 |
| 5.0 | 12.8m | 1.24 |
| 6.0 | 13.1m | 1.47 |
| 8.0 | 13.7m | 1.95 |
| | | |

125 Ultra





- · Throws up to 21m
- · Check valve prevents puddling
- · ProTech top for playing fields
- 1" BSPF thread

| 5 Year Guarantee | |
|---------------------|--|
| Code Price £ | |
| KHP31 65.00 | |

| Nozzle | Bars | Radius | m³/hr |
|--------|------|--------|-------|
| 7 | 3.4 | 14.3m | 1.59 |
| 10 | 4.1 | 15.8m | 2.52 |
| 15 | 4.8 | 17.4m | 3.45 |
| 20 | 4.8 | 19.2m | 4.36 |
| 25 | 4.8 | 20.7m | 5.79 |

Accessories



| | | Code | Price £ |
|---|----------------------|-------|---------|
| 2 | Nozzle Key | KHKEY | 2.00 |
| | Nozzle insert collar | KHCOL | 1.50 |



| | Code | Price £ |
|------------------------|----------|---------|
| 12" swing joint ½" top | KHSJ12-2 | 2.90 |
| 12" swing joint ¾" top | KHSJ12-3 | 2.90 |

3/4" hase thread fits to tees or saddles (see page 42)

Hanging Basket System





Ever wanted to water a garden, but thought it was too complicated?

Access have designed a new range of kits which include all the parts you need to set up the system. Automatic controllers can be added to irrigate whilst on holiday, and several systems can easily be run from a standard ½" tap.

Easy Installation





Clip to wall

The ideal way to water baskets and tubs



- Easy to install
- Unobtrusive pipework
- Top quality nozzles for reliability
- Can be automatic



Small

10

10

25

1

20m

Large

25

25

100

3

40m Pipe

What you get:

Drippers

Pipe clips

Branching tees

Tap connector

Stakes

Cut to length




Insert dripper

Hanging baskets and planters enhance any property, but are a nightmare to water. Now, with this easy to install system, everything can be watered with the turn of a tap.

The Access dripper kit uses a pressure compensating nozzle ensuring that the output is the same whether the drippers are at eaves or ground level. It also allows 6mm piping to be used. This is only pencil thick and is black for long life. Pipe clips with masonry nails are supplied to fix to brick or timber.

An adaptor enables the system to be connected to the outlet of your tap. For completely automatic watering see p28.



Waters up to 25 baskets



Fit lead and stake



| Maximum Number of Drippers* | | | |
|-----------------------------|---------|------------|----------|
| Pipe | Water t | Spacing | |
| Length | One End | The Centre | Туре |
| 25m | 57 | 76 | A |
| 50m | 39 | 70 | A |
| 75m | 31 | 62 | A |
| 100m | 27 | 58 | A |
| 200m | 18 | 44 | A |
| 50m | 27 | 58 | • |
| 100m | 18 | 48 | • |

- = drinners equally spaced down length of nine
- drippers predominantly at the far end of the pipe



| | Code | Price £ |
|-----------|--------|---------|
| Small kit | DW10BK | 32.00 |
| Large kit | DW25BK | 65.00 |

Contractor Packs

Everything you need to get you going, ideal for installing systems around pubs, restaurants and patio areas. On the large kit all small components are housed in one reusable and re-sealable container.



| Kit | Code | Price £ |
|-------|-------|---------|
| Large | DWCP | 205.00 |
| Small | DWCPH | 124.00 |

| | What | you get: |
|-------|-------|--------------------------|
| Small | Large | |
| 75 | 100 | Drippers and stakes |
| 120m | 160m | Pipe |
| 200 | 200 | Pipe clips |
| 10 | 30 | Branching tees |
| 10 | 20 | Straight connectors |
| 50 | 100 | Stop ends |
| 3 | 10 | Tap connectors |
| - | 1 | Re-usable components box |

Components

| Installing large numbers of basket systems? Then buy in bulk! | | | |
|---|------|---------------|---------|
| | | Code | Price £ |
| | 10 | D2PCT-T | 7.30 |
| Drippers | 25 | D2PCT-Q | 17.00 |
| | 100 | D2PCT-H | 62.00 |
| Stakes | 25 | DAS-Q | 3.80 |
| Stakes | 100 | DAS-H | 11.00 |
| Supply Pipe Only | 100m | P14-100M | 31.00 |
| Supply or Dripper Pipe | 20m | P13-20M | 18.00 |
| Dropobing Toos | 10 | FBT6-T | 3.50 |
| Branching Tees | 100 | FBT6-H | 21.00 |
| Otoricht Occupation | 10 | FBK6-T | 2.70 |
| Straight Connectors | 100 | FBK6-H | 11.00 |
| Cton Endo | 10 | PA12=1-T | 1.40 |
| Stop Ends | 100 | PA12=1-H | 6.30 |
| HOi | 25 | FPCN6-Q | 2.50 |
| Hammer Clips | 100 | FPCN6-H | 7.20 |
| Tap fittings | 1 | DWTF | 3.20 |
| with filters | 10 | DWTF-T | 18.00 |

DB Valve and Kit



Water regulations require a DB valve to be fitted 300mm above the highest dripper. The fixing kit gives the parts required to fit the valve into the small bore pipe at high level.

Inlet: 3/4"F Outlet: 3/4"M

| | Code | Price £ |
|------------|---------|---------|
| DB Valve | EVDB3 | 114.00 |
| Fixing Kit | EVDB3KT | 3.80 |







Hanging Basket Feeder

Feeding baskets has always been a problem, especially as the small compost volumes of a basket and the regular watering required conspire to rob the plants of the nutrients they need.

The feeder is connected to the irrigation pipework. Inside is a slow release fertiliser which feeds every time you water. Two cartridges should last a season and the first cartridge should be replaced after 2 months.

| Flow range: | 1 – 200 l/h |
|--------------------|----------------------------------|
| Max pressure: | 4.0 bar (58 psi) |
| Plating and the de | Connector for 3.5-4.0 mm ID pipe |
| Fittings supplied: | Brass quick connectors |

| | Code | Price £ |
|-----------------------|--------|---------|
| Hanging Basket Feeder | AFBP | 62.00 |
| Replacement Cartridge | AFBP-C | 19.00 |



Brass quick connector



Small bore connector





Battery Controllers

Battery operated controllers are becoming increasingly sophisticated and reliable, and allow automatic control anywhere – making them ideal for remote locations. We carefully select controllers, ensuring they will endure the damp – vital in Britain! Batteries will last a whole season. Always protect controllers from frost.

Galconette - Single Station



A simple, reliable tap timer with large display and plenty of features.

Manual over-ride with auto off function.

| | Code | Price £ |
|--------------------|---------|---------|
| Galconette | EPAGT | 59.00 |
| Battery (1 needed) | C280-9V | 1.90 |

Single Valve Bluetooth Controller



No more fiddling about at the tap to programme the controller, the Galcon app allows remote programming from up to 10m away. If it is raining, the app allows easy access to the rain off function.

| | Code | Price £ |
|--------------------|---------|---------|
| Galconette BT | EPAGBT | 65.00 |
| Battery (1 needed) | C280-9V | 1.90 |

| Button operation | • Rain off button | |
|---|----------------------|--|
| • Screws directly on to an outdoor tap (%"F x %"M) | | |
| ✓ 4 starts per day | X Cycling option | |
| ✓ 1min - 12hr watering time ✓ 1 year battery life (average) | | |
| Seasonal adjust | X Rain sensor option | |

| Button or App programing | • Rain off via button or App | |
|--|------------------------------|--|
| • Screws directly on to an outdoor tap (%"F x %"M) | | |
| ✓ 4 starts per day | X Cycling option | |
| ✓ 1 min - 12hr watering time ✓ 1 year battery life (average) | | |
| X Seasonal adjust | ✗ Rain sensor option | |

Galcon - 1 and 4 Station



Controller can either be mounted on a valve or wall mounted (bracket included). Manual over-ride.

| | Code | Price £ |
|--------------------------------------|---------|---------|
| Single station with 1" valve | EPAG01 | 124.00 |
| 4 station controller only | EPAGDC4 | 111.00 |
| 1" valve for 4 station (fit up to 4) | EPAGV | 35.00 |
| Battery (1 needed) | C280-9V | 1.90 |
| Rain sensor | ERS | 42.00 |

| Rain off button | For outdoor use | |
|--|---------------------------------|--|
| • Each station can be programmed independently | | |
| ✓ 4 starts per day | X Cycling option | |
| ✓ 1min - 12hr watering time | ✓ 1 year battery life (average) | |
| ✓ Seasonal adjust | ✓ Rain sensor option | |

Hunter Pro Tap Timers



This rugged timer is controlled via a Bluetooth app on your Smartphone. Push-button manual start to allow up to 1 hour of watering. Two irrigations modes with two start times each.

One or two outlet options. 2 year

Pressure: 0.5-8 bar

warrantv.

| | Code | Price £ |
|---------------|---------|---------|
| Single outlet | EPART01 | 80.00 |
| Twin outlet | EPART02 | 124.00 |

| • App programming with manual button • Rain delay up to 7 days via app • Screws directly on to an outdoor tap (%"F x %"M) | | | |
|---|----------------------------------|--|--|
| ✓ 4 starts per day | ✓ Cycling option | | |
| ✓ 1sec - 24hr watering time | ✓ 2 x 1.5v AA batteries included | | |
| X Seasonal adjust | X Rain sensor option | | |









Hunter X2 Controller



Easy-to-configure control panel for up to 14 zones, including 3 programs and 4 start times each. Plug in the revolutionary WAND module to allow remote management and advanced water-saving features using the Hydrawise software. Hydrawise maximises water savings by automatically adjusting irrigation schedules based on the local weather. It also compatible with Amazon Alexa™ and Control4® home automation. 2 year warranty.

| • Easy to use dial • Rain off setting on dial | Lockable outdoor controller Optional WAND with Hydrawise software | |
|---|---|--|
| ✓ 12 starts per day | X Cycling option | |
| ✓ 1min – 12hr watering time | ✓ Non volatile memory | |
| ✓ Seasonal adjust | ✓ Rain sensor option | |



| | Code | Price £ |
|-----------------------|---------|---------|
| 4 Zone X2 controller | EPARX04 | 118.00 |
| 8 Zone X2 controller | EPARX08 | 175.00 |
| 14 Zone X2 controller | EPARX14 | 271.00 |
| Rain sensor | ERS | 42.00 |
| WAND upgrade | EPARXWF | 139.00 |

Hunter HCC Controller



This commercial grade controller comes with 8 zones as standard but has three expansion slots to allow a maximum of 38 zones; or upgrade to a decoder system with a 54 zone capacity. Hydrawise maximises water savings by automatically adjusting irrigation schedules based on the local weather. It also compatible with Amazon Alexa™ and Control4® home automation. With a built-in milliamp sensor, troubleshooting faulty wires is a breeze. Easily install a Flow Meter to accurately monitor flow, prevent wasted water, and avoid damaged landscapes.

5 year warranty.

| 8cm full colour screen Two zones can run simultaneously | Lockable outdoor controller with key Wifi with Hydrawise software |
|---|--|
| ✓ 36 starts per day | ✗ Cycling option |
| ✓ 1min – 24hr watering time | ✓ Non volatile memory |
| ✓ Seasonal adjust | ✓ Rain sensor option |

| | Code~ | Price £ |
|--------------------------|---------|---------|
| 8 zone HCC controller | EPARHCC | 572.00 |
| 8 zone expansion module* | EPARM8 | 195.00 |
| Decoder module | EPARCDM | 287.00 |
| 1 zone decoder | EPARCD1 | 81.00 |
| Flow meter | EFAYFM | 163.00 |

^{* 4} zone and 22 zone modules available

Hunter Node Controller



This waterproof timer is ideal for valve box installations, removing the need to lift dirty covers to alter the settings. Controlled via a Bluetooth app on your Smartphone. Three irrigation modes with 8 start times each.

2 year warranty.



| | Code | Price £ |
|-----------------------------|---------|---------|
| Single zone with 1" valve | EPARN01 | 140.00 |
| 4 zone controller only | EPARN04 | 181.00 |
| 1" solenoid valve | EPAGV | 35.00 |
| Soil moisture sensor | EPARNS | 47.00 |
| 9v battery (accepts 1 or 2) | C280-9V | 1.90 |

| App programming with manual buttonNeed text | • Rain delay up to 99 days via app | | |
|--|---------------------------------------|--|--|
| ✓ 24 starts per day | ✓ Cycle and soak | | |
| ✓ 1sec- 12hr watering time | ✓ 1 year battery life (average) | | |
| ✓ Smart weather adjust | ✓ Moisture sensor option | | |

Heron Multi-wire











| Stations | Code | Price £ |
|----------|---------|---------|
| 6* | EPAH06 | 246.00 |
| 8 | EPAH08 | 299.00 |
| 12 | EPAH12~ | 383.00 |
| 16 | EPAH16~ | 516.00 |
| 24 | EPAH24~ | 730.00 |
| 32 | EPAH32~ | 786.00 |

| | Code | Price £ | | Code | Price £ |
|--------------------------|---------|---------|----------------------------|----------|---------|
| Light Sensor | EPAHLS~ | 237.00 | Lockable Outdoor Enclosure | EPAHBX~ | 64.00 |
| Humidity Sensor | EPAHHS~ | 315.00 | Wet Leaf Interface | EPAHWLI~ | 85.00 |
| Rain Sensor with Bracket | EPAHRB | 124.00 | | | |

One of the most dependable controllers on the market. All units feature large backlit displays and the ability to give zones personalised names.

Plastic case; digital settings; LCD display; input 240v; output 24v AC @ 1.3A; pump start; electronic fuse; timing range; 1 sec to 60 min & 1 min to 60 hrs.

| Remote start | Programme freeze | | |
|---|-------------------------|--|--|
| Multiple programmes | Delay between valves | | |
| • 3 year warranty | Fertigation option | | |
| • 16 station units and above are expandable to 160 stations | | | |
| ✓ 64 starts per day | ✓ Cycling option | | |
| ✓ 1sec – 10hrs watering time | ✓ 5 year battery backup | | |
| ✓ Seasonal adjust | ✓ Rain sensor option | | |
| | | | |

^{*}More limited functionality

Solenoids and Low Voltage Cable

Bermad Valves 24V AC



24v AC coil can be used on 12v DC outputs.

| Ra | tino | r 1 | 7 | W |
|------|------|-----|-----|-----|
| ı ıa | ung | | . / | V V |

- · Pressure range: 0.7 10 bar
- · Flow control stem
- · Manual over-ride

| | Code | Price £ |
|------------|----------|---------|
| 1" BSPF | ESVB4 | 30.00 |
| 1½" BSPF | ESVB6 | 76.00 |
| 2" BSPF | ESVB8 | 87.00 |
| Spare Coil | ESVBC24V | 21.00 |

Hunter Valves 24V AC



- Versatile and robust
- Flow control
- Flow rate: 0.05 9 m³/hr
- Pressure range: 1.5 10 bar

| | Code | Price £ |
|---------|-------|---------|
| 1" BSPF | ESVP4 | 22.00 |

Hunter PGV Battery 9V DC



- · Designed for battery systems
- · Flow control stem
- Flow rate: 0.05 9 m³/hr
- Pressure range: 1.5 10 bar

| Tressure range. 1.5 To bar | | | |
|----------------------------|-------|---------|--|
| | Code | Price £ | |
| 1" BSPF | EPAGV | 35.00 | |

Accu-Sync for Hunter



- · Adjustable pressure
- regulation (1.5 7 bar) · Works with Hunter PGV valves
- Max pressure rating: 10 bar

| | Code | Price £ |
|-----------|--------|---------|
| Accu-sync | ESVHAS | 49.00 |

Low Voltage Cable

Heavy duty 0.8mm cable for wiring solenoids. 1 core needs to be used for the 'common return', so a 4 core cable will wire 3 solenoids etc.

| | 10m | Price £ | 100m | Price £ |
|---------------|----------|---------|----------|---------|
| 4 Core Cable | ELCS04-T | 24.00 | ELCS04-H | 108.00 |
| 6 Core Cable | ELCS06-T | 29.00 | ELCS06-H | 164.00 |
| 12 Core Cable | ELCS12-T | 64.00 | ELCS12-H | 340.00 |

Connectors



Easy to use - no wire stripping needed.

| | Qty | Code | Price £ |
|---|-----|--------|---------|
| Grease filled connectors | 10 | ELCG-T | 11.00 |
| for joining cable to Solenoid valves | 50 | ELCG-L | 48.00 |

Cable & Crimps



2.5mm Hunter approved 2 core decoder cable.

Grease connector allows easy connection of cables with grease pot to prevent corrosion.

| | Code ~ | Price £ |
|---------------------------|------------|---------|
| 2 core decoder cable 250m | ELCS2D-25H | 523.00 |
| 2 core decoder cable 500m | ELCS2D-5H | 874.00 |
| Grease connector | ELCGD | 3.30 |

Floating Level Switch



3 wire design allows circuit to open or close on contact. Suitable for high or low water applications.

| Lead | Code | Price £ |
|------|---------|---------|
| 3m | EWTFL03 | 53.00 |
| 10m | EWTFL10 | 77.00 |

Floating level switches stop pump damage if you run out of water.

Pressure Vessels & Switches





5 Way Kit consists of:

- 1" 5 way tee
- 1" non-return valve
- 1" brass nipple
- 10 bar pressure gauge

| Price | Code ~ | BSPM | Bar | Capacity |
|-------|----------|------|-----|----------|
| 87.0 | EPV024LH | 1" | 10 | 24 L * |
| 174.0 | EPV060LV | 1" | 10 | 60 L |
| 283.0 | EPV100LV | 1" | 10 | 100 L |

*Horizontal

| | Code | Price £ |
|--|---------|---------|
| 5 Way Kit | EPVSK06 | 55.00 |
| 6 bar Pressure Switch | EPUPS06 | 103.00 |
| 1m long connecting pipe 1" BSPF x 1" BSPM | EPBH1M | 41.00 |

~ see p52



Installer approved! Our installers love these quality pumps for their reliability and ease of draindown and maintenance.

Horizontal Pumps

((b) LOWARA



High quality pumps

- · Stainless steel body and shaft
- · IP55 continuous rated motor
- · Built-in thermal protection
- · Ceramic/Carbon/EDPM seal
- · Full after sales service





| ВG | Series |
|----|--------|
| | |

| | F | LOW (m | ³/hr) @ : | xxm hea | ad | | | SINGLE PHAS | E | |
|---------|-----|--------|-----------|---------|-----|----------------|------|----------------|-----------|---------|
| Model | 20m | 30m | 40m | 50m | 60m | In/Out BSPF | kW | F.L.C. Amps | Code | Price £ |
| BGM3/A | 2.0 | 0.6 | | | | 11/4" / 1" | 0.37 | 2.96 | EP1BG03 | 427.00 |
| BGM7/A | | 2.6 | 1.3 | | | 11/4" / 1" | 0.75 | 5.00 | EP1BG07 | 496.00 |
| BGM11/A | | 4.2 | 2.2 | 0.5 | | 11/4" / 1" | 1.1 | 6.47 | EP1BG11 | 620.00 |
| 5HM03P | 5.0 | | | | | 11/4" / 1" | 0.50 | 3.38 | EP14HM5~ | 727.00 |
| 5HM04P | 6.3 | 4.7 | 2.4 | | | 11/4" / 1" | 0.75 | 4.79 | EP14HM7~ | 931.00 |
| 5HM05P | 6.8 | 5.8 | 4.2 | 2.4 | | 11/4" / 1" | 0.95 | 5.69 | EP14HM9~ | 1187.00 |
| 5HM06P | | 6.5 | 5.5 | 4.2 | 2.5 | 1 1/2" / 1" | 1.91 | 8.42 | EP14HM11~ | 1535.00 |



3 phase also available

Genyo Auto-start Unit



Converts pumps so that they start automatically when a pressure drop is detected, such as when a tap is opened or an irrigation valve operates.

- · IP65 rated body
- · 1" BSPM inlet and outlet
- · Operates pumps up to 16 amps
- · Max 10 bar pressure
- · Pressure Gauge included

| Pressure Losses | | | | | | | |
|-----------------|------------|--|--|--|--|--|--|
| Loss (m) | Flow m³/hr | | | | | | |
| 2 | 3.4 | | | | | | |
| 5 | 5.2 | | | | | | |
| 10 | 7.5 | | | | | | |

| | Code | Price £ |
|-------|-----------|---------|
| Genyo | EPUPSTF | 289.00 |
| Union | FPTII4-4F | 22.00 |

Union fitting

Allows the Genyo unit to always face forward and to be removed from the pump without unwiring the entire unit.



Vertical Pumps

These vertical pumps are ideal for larger flows. For more 'mission critical' applications we also sell the Lowara range of pumps which boast a network of service engineers for fast breakdown assistance.





| 坏 | ESPA | |
|---|------|--|
| | | |



| | FLOW | (m³/hr) | @ xxm | head | | | | 5 | INGLE PI | IASE | | | TH | REE PHASE | |
|------------|------|---------|-------|------|-----|-----|----------------|------|----------------|---------|---------|-----|----------------|-----------|---------|
| Model | 20m | 30m | 40m | 50m | 60m | 70m | In/Out BSPF | kW | F.L.C. Amps | Code ~ | Price £ | kW | F.L.C. Amps | Code ~ | Price £ |
| Multi 35.3 | 7.7 | 4.7 | | | | | 1½" / 1¼" | 0.75 | 6.7 | EP1M353 | 732.00 | | | | |
| Multi 35.4 | 9.0 | 7.3 | 5.4 | | | | 1½" / 1¼" | 1.1 | 8.4 | EP1M354 | 882.00 | 1.1 | 3.1 | EP3M354 | 882.00 |
| Multi 35.5 | 9.7 | 8.4 | 6.9 | 5.4 | 3.0 | | 1½" / 1¼" | 1.5 | 10.2 | EP1M355 | 1095.00 | 1.5 | 4.0 | EP3M355 | 1061.00 |
| Multi 55.4 | 17.0 | 13.2 | 8.2 | 0.8 | | | 1½" / 1¼" | | | | | 2.0 | 4.8 | EP3M554 | 1385.00 |
| Multi 55.6 | | 17.8 | 15.9 | 12.7 | 8.8 | 4.5 | 1½" / 1¼" | | | | | 3.0 | 7.0 | EP3M556 | 1545.00 |



River and Lake Pump Package

Professional pump system

Designed for easy pumping from wells and rivers the package includes a DAB1200X auto-start submersible pump, suspension kit, disc filter and 25m of pipe. Will handle moderately sediment loads. For dirtier water upgrade a floating inlet and to a semi-automatic filter (p36).

For fully automated irrigation using river water, pair up with a valve box (p23) and controller.

What you get

- · DAB 1200X auto-start pump
- · Isolator switch
- · Stainless steel suspension chain
- · 1" Disc filter and shutoff valve
- · 25m of 25mm MDPE pipe

| Code | Price £ |
|--------|---------|
| EPPKLR | 873.00 |



Suction Hose







EWTRPI Floating inlet

| | | Code | Price £ |
|----------|--------------------------------|----------|---------|
| | Suction Hose 5m | PHS4-5M | 33.00 |
| | Suction Hose 30m | PHS4-25M | 125.00 |
| 1" | 1" BSP Male Coupling - brass | FHB4-4 | 8.60 |
| | 1" BSP Female Coupling - brass | FHB4-4F | 5.00 |
| | Super Clamp | FHSC4 | 1.60 |
| | Suction Hose 5m | PHS8-5M | 57.00 |
| | Suction Hose 30m | PHS8-30M | 259.00 |
| 2" | 2" BSP Male Coupling - brass | FHB8-8 | 34.00 |
| | 2" BSP Female Coupling - brass | FHB8-8F | 23.00 |
| | Super Clamp | FHSC8 | 2.70 |
| Floating | inlet for 1" suction hose | EWTRPI | 55.00 |
| 1m suct | ion hose pre-assembled 1" BSPF | PHS4C-1M | 27.00 |

Auto-start Submersible



Auto-start copes with 'water-out' situations

Designed to cope with 'water out' situations, the pump will automatically stop if the water supply runs out, then periodically try to restart until the water supply returns. Built-in non-return valve. DAB1200X requires buffer vessel to protect the pump. DAB55X is a variable speed pump so will cope with high and low water flows.



EWTRPI-1M Floating inlet



EPBV4 Buffer vessel

| | FLO | DW (m³/hr) | @ xxm h | ead | ln . | Out | F.L.C. | Code | Price £ |
|---|------|------------|---------|------|------|------|--------|----------|---------|
| Model | 20m | 30m | 40m | 50m | BSPF | BSPF | Amps | Code | Price £ |
| DAB1200X | 4.2 | 3.0 | 1.4 | _ | 1" | 1" | 4.8 | EP1V12X | 563.00 |
| DAB55X | 5.75 | 5.1 | 4.5 | 3.75 | 1" | 1¼" | 5.0 | EP1V55X~ | 1461.00 |
| Floating inlet with 1m suction hose and 1" BSPM thread | | | | | | | | | 77.00 |
| Buffer vessel with 1" BSPM thread | | | | | | | | | 91.00 |
| Suspension kit for polythene tanks—includes 1.5m stainless steel chain and securing bracket | | | | | | | | EPSK | 37.00 |
| Submersible pump kit for wells with 3m stainless steel chain & bracket | | | | | | | | | 77.00 |



+ see p52

Designed to boost the pressure of the water supply

- · Complies with the Water Regulations
- Simple to Install

These units are designed for systems where pressure is a problem or compliance with the Water Regulations is required. The units are pre-assembled and simply need to be connected to a power and mains water supply.

Pre-assembled Pump Unit



Designed for easy pump installation the pump is supplied mounted on a plate and pre-wired with a Genyo auto-start unit and to an isolator switch.

The auto-start unit brings the pump on as soon as a drop is pressure is detected.

Includes 1m of suction hose with 1" BSPF fittings to connect to an irrigation tank outlet.

Suitable for Lowara horizontal pumps pump NOT included.

| Code + | Price £ |
|--------|---------|
| ЕРРКНА | 648.00 |

Compact Pressure Booster Units



Designed for lower flows where compliance with the Water Regulations is required. The flow from the unit must be less than or equal to the flow into the tank.

650mm diameter x 1100mm high Inlet: 3/4" BSPM Outlet: 1"F

| Head | Flow (m³/hr) |
|------|--------------|
| 20m | 4.2 |
| 30m | 3.0 |
| 40m | 1.4 |

| Code + | Price £ |
|----------|---------|
| EPTS0200 | 1499.00 |

500L Pressure Booster Unit



Tank holds a buffer of water allowing the pump to operate at higher flows 610mm x 1060mm x 1330mm high

Inlet: 3/4" BSPM

Outlet: 1" BSPF

| Head | Flow (m³/hr) | | |
|------|--------------|--|--|
| 20m | 4.2 | | |
| 30m | 3.0 | | |
| 40m | 1.4 | | |

| Code + | Price £ | | |
|----------|---------|--|--|
| EPTS0500 | 1638.00 | | |

1250L Pressure Booster Unit



Tank holds a buffer of water allowing the pump to operate at higher flows. Two pump options.

1200mm dia x 1200mm high Inlet: 3/4" BSPM Outlet: 1" BSPF

| Duma | FL | DW (m³/hr) | @ xxm he | Code + | Price £ | |
|----------|------|------------|----------|--------|-----------|---------|
| Pump | 20m | 30m | 40m | 50m | Code + | Price z |
| DAB1200X | 4.2 | 3.0 | 1.4 | _ | EPTS1250 | 1845.00 |
| DAB55X | 5.75 | 5.1 | 4.5 | 3.75 | EPTS1250H | 2774.00 |

~ see p52

Pump Relay



Transformer Box





This reliable pump relay box provides a simple interface between pump and 24v AC signal from the controller. No low water over-ride. Lockable enclosure.

| FLC Amps | Code | Price £ |
|----------|--------|---------|
| 12 | ESB1PH | 149.00 |

- 1872 ESBLITE

240v - 24v transformer. 1 input 1 output mounted in IP65 box. Ideal for operating solenoid valve via float switch for mains fill.

| Amps | Code + | Price £ |
|------|--------|---------|
| 3 | ESB1TB | 161.00 |

Pump Starters









low water over-ride to

protect the pump.



Top up rainwater storage tanks with mains water in Summer. Adjustable sensor allows for minimal re-filling. providing plenty of space for

| ρ. | v | ٠. | u., | .9 | Pioi | ٠ |
|----|----|----|-----|----|------|---|
| ra | ir | ıw | at | er | | |

| | Code + | Price £ |
|-------|----------|---------|
| Above | EWTFC-BK | 392.00 |
| Below | EWTFB-BK | 581.00 |



Isolator Switch

| | FLC Amps | Code + | Price £ |
|----------------------------------|----------|--------|---------|
| 1PH Heavy Duty Starter | 16 | ESB1HD | 386.00 |
| 3PH Heavy Duty Starter | 16 | ESB3HD | 411.00 |
| 1PH Isolator Switch (no starter) | 25 | ESBI | 40.00 |

Heavy Duty Starters include a thermal overload for enhanced pump protection. Specify pump Full Load Current (FLC) when ordering heavy duty starters so that the correct thermal overload can be fitted.

Above ground tanks

240v transformer, float switch and 1" solenoid to fit into mains supply pipe to tank ball valve

Below ground tanks

240v transformer and 2 float switches (one for alarm), air gap compliance kit, overflow alarm & 1" solenoid valve to connect to mains water supply

Pre-assembled Tanks with Air Gap

Includes air gap to comply with water regulations, inlet ball valve, overflow, tank outlet with gate valve.

Inlet: 3/4" BSPM Outlet: 1" BSPF



| Capacity | Ø x H mm | Code + | Price £ |
|----------|------------------|---------------|---------|
| 200 L | 650 Ø x 780 | EPTS0200-TANK | 308.00 |
| 500 L | 615 x 900 x 1200 | EPTS0500-TANK | 479.00 |
| 1250 L | 1200 Ø x 1200 | EPTS1250-TANK | 580.00 |
| 2000 L | 1200 Ø x 1960 | EPTS2000-TANK | 717.00 |

Polythene Tanks UV stabilised polythene





- · Access hatch
- Threaded outlets

Water regulations reauire irrigation tanks to have a Type 'AB' overflow.



2 Year **Guarantee**

| Price £ | Code ~ | Ø x H mm | Outlet | acity | Cap |
|---------|----------|-------------|--------|-----------|----------|
| 293.00 | EWTX1250 | 1200 x 1200 | 1.5" M | 278 Gal | 1,250 L |
| 377.00 | EWTX2000 | 1200 x 1960 | 1.5" M | 440 Gal | 2,000 L |
| 425.00 | EWTX2500 | 1400 x 1800 | 1.5" M | 550 Gal | 2,500 L |
| 810.00 | EWTX5000 | 1900 x 2185 | 2" M | 1,100 Gal | 5,000 L |
| 1230.00 | EWTX10K | 2400 x 2500 | 2" M | 2,100 Gal | 10,000 L |
| 1450.00 | EWTX12K | 2600 x 2600 | 2" M | 2,750 Gal | 12,500 L |

These tanks are made from black MDPE, maintenance free

and have an 18" or 24" screw hatch

Needs large lorry access and unloading facilities. Craned or remote deliveries will be charged extra.

~ see p52

Filters



Screen Filter



- · Fine filter suitable for drip systems
- · Twin pressure gauge ports on 2" models
- · Washable filter
- · Amiad Tagline range

| Max Flow | Thread Size | Filter Size | Maximum Pressure | Code | Price £ |
|-------------|----------------|----------------|---------------------|----------|---------|
| 3 m³/h | 3/4"M | 0.13mm | 8 bar | EFP3-0.1 | 14.00 |
| 7 m³/h | 1"M | 0.13mm | 8 bar | EFP4-0.1 | 19.00 |
| 15 m³/h | 1½"M | 0.13mm | 8 bar | EFP6-0.1 | 84.00 |
| 25 m³/h | 2"M | 0.13mm | 8 bar | EFP8-0.1 | 157.00 |

Disc Filter



- Ideal for dirtier water applications
- · Disc provides greater filtration area
- · Fine filter suitable for drip systems
- · 1" filter not Amiad and has no drain valve

| 3 m³/h | 3/4"M | 0.13mm | 8 bar | EFP3-0.1 | 14.00 |
|---------|-------|--------|-------|----------|--------|
| 7 m³/h | 1"M | 0.13mm | 8 bar | EFP4-0.1 | 19.00 |
| 15 m³/h | 1½"M | 0.13mm | 8 bar | EFP6-0.1 | 84.00 |
| 25 m³/h | 2"M | 0.13mm | 8 bar | EFP8-0.1 | 157.00 |
| | | | | _Q a | mıad |

| Max Flow | Thread Size | Filter Size | Maximum Pressure | Code | Price £ |
|-------------|----------------|----------------|---------------------|---------|---------|
| 3 m³/h | 1"M | 0.13mm | 6 bar | EFPD4-Y | 50.00 |
| 8 m³/h | 1½"M | 0.10mm | 10 bar | EFAD6-Y | 242.00 |

Filter in Washer



Fits 3/4" F fittings.

| Code | Price £ |
|------|---------|
| P67 | 1.00 |

Semi-automatic Filter



Semi-automatic filter with built-in cleaning nozzles for fast and effective filter cleaning. Integrated clogging meter automatically indicates when cleaning is required.

Plastic ribbed filter body with stainless steel 'weave-wire' with a large filtration capacity.

| Max Flow | Thread Size | Filter Size | Maximum Pressure | Code ~ | Price £ |
|-------------|----------------|----------------|---------------------|-----------|---------|
| 40 m³/h | 2" | 0.13mm | 10 bar | EFPA8-0.1 | 499.00 |


Pressure Regulators



| | Flow Rate | Pressure Range | Code | Price £ |
|-------------------------|---------------------------|----------------|-----------|---------|
| | 0.01 - 5m³/h | 0.5 - 1.2 bar | EPR3LFM-A | 21.00 |
| %"F x %"M Adjustable | 0.01 - 5m ³ /h | 0.8 - 2.5 bar | EPR3LFM-B | 21.00 |
| Delrin | 0.2 - 5m³/h | 2.0 - 4.0 bar | EPR3FM-C | 15.00 |
| | 0.2 - 5m³/h | 3.5 - 6.0 bar | EPR3FM-D | 15.00 |
| | 0.4 - 8m³/h | 0.5 - 1.2 bar | EPR4F-A | 42.00 |
| 1"F x 1"F Adjustable | 0.4 - 8m³/h | 1.0 - 2.0 bar | EPR4F-B | 42.00 |
| Acetal | 0.4 - 8m³/h | 1.5 - 3.5 bar | EPR4F-C | 42.00 |
| | 0.4 - 8m³/h | 3.0 - 5.5 bar | EPR4F-D | 42.00 |

Tank Fittings

| | Polythene Tanks | Code | Price £ |
|-----|----------------------------|----------|---------|
| - 1 | Chamber for Stopcock | KHB10 | 11.00 |
| 2 | Stopcock | FLSC20 | 30.00 |
| 3 | Drain Point | EWDT20 | 17.00 |
| 4 | Female Elbow | FLE20-3F | 2.50 |
| 5 | 3/4" ball valve with float | ETVB3 | 98.00 |
| 6 | Overflow Weir Mesh | EWTWEIR | 14.00 |
| 7 | Floating Level Switch-3m | EWTFL03 | 53.00 |
| 8 | Tank Connector | FUTTC4 | 16.00 |
| 9 | 1" Gate Valve | EVG4 | 15.00 |
| | 1" Tank Overflow | ETOF4 | 24.00 |

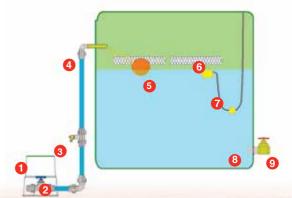



Contents

| Threaded Fittings | 39 |
|------------------------------|----|
| Pipe & Pipe Clips | 40 |
| Barbed Fittings | 41 |
| Compression Fittings | 42 |
| Meters & Tools | 44 |
| Threaded Valves & Taps | 45 |
| uPVC Pipe & Fittings | 46 |
| Eindor Taper Fittings | 48 |
| Filters & Valve Boxes | 49 |

Terminology

| O.D. | = pipe outside diameter |
|---------|------------------------------------|
| I.D. | = pipe inside diameter |
| LDPE | = low density polyethylene |
| MDPE | = medium density polyethylene |
| HDPE | = high density polyethylene |
| c/p | = Co-polymerised (for longer life) |
| uPVC | = grey plastic, rigid pipe |
| PVC | = soft, flexible pipe |
| Potable | = drinking water |

Imperial/Metric Conversion

| Inch | 0.3937 | 1 | 2.54 | centimetres | | | |
|--|----------|---|----------|-------------|--|--|--|
| Foot | 3.28074 | 1 | 0.3048 | metres | | | |
| Yard | 1.093613 | 1 | 0.91440 | metres | | | |
| Acres | 2.47105 | 1 | 0.40469 | hectares | | | |
| Pint | 1.75976 | 1 | 0.56826 | litres | | | |
| Gallon | 0.21997 | 1 | 4.54609 | litres | | | |
| US Gal | 0.2642 | 1 | 3.7854 | litres | | | |
| Pound | 2.204622 | 1 | 0.453592 | kilograms | | | |
| Psi | 14.5038 | 1 | 0.069895 | bar | | | |
| e.g. 1 inch = 2.54cm 1cm = 0.3937 inches | | | | | | | |

Introduction

We only choose good quality fittings to put in our catalogue – we are often surprised at the poor quality parts that are around.

To make life less complicated we tend to stock all the popular sizes – if you have a large requirement for something unusual please give us a call.



Stuck without a ruler? Use a coin!

5p = 17mm diameter

10p = 24mm diameter

2p = 26mm diameter

£1 = 22mm diameter

Identification Tables

Thread Sizes

The O.D. of the thread and its size are different. For example a $\frac{1}{2}$ " thread has an O.D. of approx $\frac{3}{4}$ ".

| BSP Thread | 1/4" | 3/8" | 1/2" | 3/4" | 1" | 1¼" | 1½" | 2" |
|---------------------|------|------|------|------|------|------|-----|----|
| Male thread OD mm | 13 | 17 | 21 | 26.5 | 33.6 | 42 | 48 | 60 |
| Female thread ID mm | 11.5 | 15 | 18.6 | 24 | 30 | 38.5 | 45 | 57 |

Imperial Pipe

Like thread sizes, the O.D. and the pipe size are different. Wall thicknesses are denoted by its class. Black polythene pipe was generally class B, C or D. Rigid grey uPVC pipe was class C, D, E or T. We can supply adaptor fittings please ask our sales department.

| Pipe Size | 3/8" | 1/2" | 3/4" | 1" | 1¼" | 1½" | 2" |
|-----------|------|------|------|------|------|------|------|
| OD mm | 17.2 | 21.4 | 26.5 | 33.6 | 42.2 | 48.3 | 60.3 |

Metric Pipe

The pipe is measured by the O.D. Below 12mm diameter there are no standard sizes - so beware when matching small bore pipe.

| Pipe OD mm | 12 | 16 | 20 | 25 | 32 | 40 | 50 | 63 |
|-----------------------------------|----|----|----|----|----|----|----|----|
| Blue MDPE water pipe (12 bar) | | | 1 | 1 | 1 | | 1 | 1 |
| Black MDPE water pipe (10/12 bar) | | | 1 | 1 | 1 | 1 | 1 | 1 |
| Black LD/MDPE pipe (4/6 bar) | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Grey uPVC pipe (5-16 bar) | | 1 | 1 | 1 | 1 | 1 | 1 | / |

Copper Pipe

Available in O.D. sizes 15, 22, 28, 35, 42 mm.

If you can't easily work out the OD of a pipe, wrap a strip of paper round and mark where it overlaps. This will then give circumference of pipe. Divide by pi (3.1428) to give pipe diameter.

Want to know your water flow?

Take a container of a known volume (e.g. 101) and time how many seconds it takes to fill with the tap 3/4 open (e.g. 20 seconds). Divide the volume by the time then multiply by 3600. e.g. $\frac{10}{20}$ (bucket size) x 3600 = 1,800 l/h $\frac{10}{20}$

Eindor Taper Fittings

We have been using these fittings for many years — the push fit design has been tested to 6 bar!

Pre-packed in resealable, labelled bags. Easy to open, easy to identify.

We try to be helpful!



12mm Connector



For 12mm OD poly. Bottom end fits 6mm F fittings eg KEP.

| Qty | Code | Price £ |
|-----|--------|---------|
| 25 | KECL-Q | 3.70 |
| 100 | KECL-H | 12.00 |

12mm End Connector



6mm F outlet. Adapts Vibro-spin and Mini-spin to 12mm OD poly pipe.

| Qty | Code | Price £ |
|-----|--------|---------|
| 10 | KEEC-T | 2.60 |
| 100 | KEEC-H | 18.00 |

Plunger



Small barb fits 3.5mm - 4.0mm ID pipe. Large barb fits into 3mm hole punched into side wall of pipe - see p4 for punches.

| | Qty 10 | Price £ | Qty 100 | Price £ |
|-------|--------|---------|---------|---------|
| Small | KEPS-T | 3.40 | KEPS-H | 24.00 |
| Large | KEP-T | 1.80 | KEP-H | 12.00 |

1/2" M Adaptor



6mm F outlet. Adapts Vibro-spin, Minispin, Mini-fogger nozzle to ½" F thread. Will fit KESL stake.

| Qty | Code | Price £ |
|------|-------|---------|
| 10 | KEM-T | 5.20 |
| 100 | KEM-H | 45.00 |
| - 10 | | |

Barbed Collar



Small barb fits 3.5mm - 4.0mm ID pipe. Large barb fits 6.8mm x 4.00mm downtubing.

| | Qty 25 | Price £ | Qty 100 | Price £ |
|-------|--------|---------|---------|---------|
| Small | KECS-Q | 8.60 | KECS-H | 30.00 |
| Large | KEC-Q | 3.40 | KEC-H | 9.70 |

Tee



6mm F.

| Qty | Code | Price £ |
|-----|-------|---------|
| 10 | KET-T | 2.50 |
| 100 | KET-H | 15.00 |

Threaded Caps



Allows nozzles and fittings to be converted to BSPF threads. Cap outlets fit Mini-spin and Vibro-spin nozzles.

| Thread | Qty 10 | Price £ | Qty 100 | Price £ |
|--------|---------|---------|---------|---------|
| ½" - F | KECP2-T | 5.30 | KECP2-H | 44.00 |
| ¾" - F | KECP3-T | 5.80 | КЕСРЗ-Н | 49.00 |

Double Nipple

Joins fittings of 6mm F.



| Qty | Code | Price £ |
|-----|-------|---------|
| 25 | KEN-Q | 3.90 |
| 100 | KEN-H | 13.00 |

Blanks



Allows male or female fittings to be blanked off.

| To blank | Qty 25 | Price £ | Qty 100 | Price £ |
|----------|---------|---------|---------|---------|
| Female | KEB-Q | 2.70 | KEB-H | 7.30 |
| Male | KECAP-Q | 3.80 | KECAP-H | 12.00 |

Mini-Tap



 $\begin{array}{l} \text{6mm M x F inlet/outlet} \\ \text{Fit with KECS/KEPS to} \\ \text{fit small bore pipe}. \end{array}$

| Qty | Code | Price £ |
|-----|-------|---------|
| 10 | KEV-T | 8.70 |
| 100 | KEV-H | 85.00 |

Threaded Adaptors



Allows nozzles and fittings to be threaded into overhead irrigation pipes.

| Thread | Qty 10 | Price £ | Qty 100 | Price £ |
|--------|--------|---------|---------|---------|
| M11 | KEPM-T | 1.60 | KEPM-H | 10.00 |
| 1/4" W | KEPT-T | 1.90 | KEPT-H | 11.00 |
| 3/8" W | KEPW-T | 2.30 | KEPW-H | 16.00 |

Repair Plugs



Allows punched holes in pipes to be repaired.

| Qty | Code | Price £ |
|-----|----------|---------|
| 100 | FBG5-BAG | 6.20 |

Threaded Fittings

These are polypropylene and rated at 6 bar

Installer Approved! Some plastic fittings are very poor but we think these are excellent.

Socket



| F | Code | Price £ |
|------|-------|---------|
| 1/2" | FPTS2 | 0.60 |
| 3/4" | FPTS3 | 0.70 |
| 1" | FPTS4 | 0.90 |
| 1½" | FPTS6 | 3.10 |
| 2" | FPTS8 | 3.90 |

Plug



| F-F | Code | Price £ |
|-----|-------|---------|
| 34" | FPTP3 | 0.40 |
| 1" | FPTP4 | 0.60 |

Tee



| F | Code | Price £ |
|------|-------|---------|
| 1/2" | FPTT2 | 1.50 |
| 3/4" | FPTT3 | 1.90 |
| 1" | FPTT4 | 2.10 |
| 1½" | FPTT6 | 5.90 |
| 2" | FPTT8 | 8.90 |

Reducing Socket



| F-F | Code | Price £ |
|------------|---------|---------|
| 34" - 1/2" | FPTS3-2 | 1.00 |
| 1" - ¾" | FPTS4-3 | 0.90 |

Tee - Male



| MMM | Code | Price £ |
|-----|--------|---------|
| 34" | FPTT3M | 1.00 |

Increasing Piece



| M-F | Code | Price £ |
|-------------|---------|---------|
| 1/2" - 3/4" | FPTI2-3 | 0.70 |
| 34" - 1" | FPTI3-4 | 1.30 |
| 1½" - 2" | FPTI6-8 | 3.40 |

Tee - Female Branch



| FMF | Code | Price £ |
|------|---------|---------|
| 3/4" | FPTT3MF | 2.10 |

Elbow Male/Female



| M-F | Code | Price £ |
|------|---------|---------|
| 1/2" | FPTE2MF | 1.10 |
| 3/4" | FPTE3MF | 1.30 |
| 1" | FPTE4MF | 1.80 |

Elbow



| | Code | Price £ |
|------|-------|---------|
| 1/2" | FPTE2 | 1.30 |
| 3/4" | FPTE3 | 1.80 |
| 1" | FPTE4 | 2.00 |
| 1½" | FPTE6 | 5.80 |
| 2" | FPTE8 | 7.60 |

Elbow - Male



| | Code | Price £ |
|---|-------|---------|
| Ī | PTE3M | 1.00 |

Nipple



| M | Code | Price £ |
|------|--------|---------|
| 1/2" | FPTN2 | 0.25 |
| 34" | FPTN3 | 0.30 |
| 1" | FPTN4 | 0.70 |
| 1"★ | FPTN4H | 1.50 |
| 1½" | FPTN6 | 1.20 |
| 2"★ | FPTN8 | 3.00 |

Reducing Nipple



| | N-M | Code | Price £ |
|-------|-----------------|---------|---------|
| 3/4 | " - ½" | FPTN3-2 | 0.30 |
| 1' | ' - ¾" | FPTN4-3 | 0.70 |
| 11/4" | ' - 1" * | FPTN5-4 | 2.80 |
| 139 | 2" - 1" | FPTN6-4 | 1.20 |
| 11/2" | - 1¼" ★ | FPTN6-5 | 3.40 |
| 2" | - 1"★ | FPTN8-4 | 3.00 |
| 2" - | 1½"★ | FPTN8-6 | 3.00 |

Reducing Bush



★ Hansen 16 bar

| M-F | Code | Price £ |
|-------------|---------|---------|
| ½" - ¼"★ | FCTR2-1 | 3.40 |
| ¾" - ½" ★ | FPTR3-2 | 1.90 |
| 1" - ½" ★ | FPTR4-2 | 2.50 |
| 1" - ¾" ★ | FPTR4-3 | 2.40 |
| 1¼" - 1" ★ | FPTR5-4 | 3.60 |
| 1½" - 1"★ | FPTR6-4 | 3.80 |
| 2" - 11/2"* | FPTR8-6 | 4.80 |

Cap and Washer



| 'O' | Ring |
|------------|-------|
| for | easy |
| sea | aling |

| F | Code | Price £ |
|------|------|---------|
| 1/2" | FMC2 | 1.20 |
| 3/4" | FMC3 | 1.10 |
| 1" | FMC4 | 1.60 |
| 1½" | FMC6 | 2.10 |
| 2" | FMC8 | 4.50 |

Polythene Pipe and Clips



Small bore pipe for drip systems see p29

| | Header & Above Ground Supply Piping – Black | | | | | | | | |
|------|---|-----|----------|----------|---------|------------|---------|--|--|
| Size | Size Bar Wall Material 50m Coil | | Material | 100m C | oil | | | | |
| mm | Ddl | mm | Waterial | Code | Price £ | Code | Price £ | | |
| 16 | 4 | 1.2 | LDPE c/p | PA16-50M | 26.00 | PA16-100M | 50.00 | | |
| 20 | 4 | 1.5 | LDPE c/p | PA20-50M | 40.00 | PA20-100M | 66.00 | | |
| 25 | 4 | 2.0 | LDPE c/p | | | PA25-100M | 80.00 | | |
| 32 | 6 | 2.6 | LDPE c/p | PB32-50M | 79.00 | PB32-100M | 133.00 | | |
| 50 | 8 | 3.0 | MDPE | | | PB50-100M~ | 266.00 | | |
| 63 | 8 | 3.8 | MDPE | | | PB63-100M~ | 413.00 | | |

Polythene pipe has a number of advantages over uPVC pipe (p46). It is less susceptible to frost damage, does not need solvents to join it and is more resistant to stone damage underground.

Choose pipe with a lower pressure rating for above ground work as it is more flexible. Choose 10 bar rated pipe for underground use where it is more difficult to spot leaks.

Underground Supply Pipe

- · 10 bar black MDPE pipe
- Thick wall for durability
- High pressure rating
- Use compression fittings

Blue water pipe must only be used for potable underground mains water supplies, such as cold water feeds to storage tanks. It must not be used for irrigation water. Black pipe with a green stripe is available for recycled water systems.

| Coil Size | 0.D. 20mm Wall 2.5mm | Bar 12 MDPE | 20mm | 0.D. 25mm Wall 2.4mm | Bar 12 MDPE | 25mm |
|-----------|-------------------------|----------------|---------|-------------------------|----------------|---------|
| | Black | Blue | Price £ | Black | Blue | Price £ |
| 25m | PEB20-25M | PE20-25M | 37.00 | PEB25-25M | | 41.00 |
| 50m | PEB20-50M | | 64.00 | PEB25-50M | PE25-50M | 67.00 |
| 100m | PEB20-100M | | 104.00 | PEB25-100M | | 131.00 |

| Coil Size | 0.D. 32mm Wall 3.0mm | 32mm | 0.D. 50mm Wall 4.6mm | 50mm | 0.D. 63mm Wall 5.8mm | 63mm |
|-----------|-------------------------|---------|-------------------------|---------|-------------------------|---------|
| | Black | Price £ | Black ~ | Price £ | Black ~ | Price £ |
| 50m | PEB32-50M | 105.00 | PEB50-50M | 252.00 | PEB63-50M | 310.00 |
| 100m | PEB32-100M | 201.00 | PEB50-100M | 456.00 | PEB63-100M | 605.00 |

Pipe Clamp and Spacer



Use round head 8/10 screws. (5mm screw hole in sizes up to 32mm. 6mm screw hole and locking clip in 50mm and 63mm)

| | Clamp | | Space | er |
|----|--------|---------|---------|---------|
| mm | Code | Price £ | Code | Price £ |
| 16 | FPCM16 | 0.80 | FPCM16S | 0.60 |
| 20 | FPCM20 | 0.90 | FPCM20S | 0.60 |
| 25 | FPCM25 | 1.00 | FPCM25S | 0.70 |
| 32 | FPCM32 | 1.40 | FPCM32S | 0.70 |
| 50 | FPCM50 | 1.70 | FPCM50S | 1.10 |
| 63 | FPCM63 | 2.40 | FPCM63S | 1.60 |

Small Coil Polypipe



Small coils of black 16mm polythene pipe - ideal for garden use. 1.0mm wall thickness.

| Length | Code | Price £ |
|--------|----------|---------|
| 25m | PA16-25M | 18.00 |

Pipe Clips



Quick, neat way of fixing pipe. Zinc pacified. 6mm and 16mm boxed in 100's 20mm boxed in 50's

| mm | Qty 25 | Price £ | Box | Price £ |
|----|----------|---------|----------|---------|
| 6 | FPCN6-Q | 2.50 | FPCN6-H | 7.20 |
| 16 | FPCN16-Q | 7.00 | FPCN16-H | 22.00 |
| 20 | FPCN20-Q | 11.00 | FPCN20-L | 18.00 |



| เร | | |
|----|------|---------|
| | Code | Price £ |
| | FLWT | 79.00 |

pipes. 250m roll. Pin Plug



Use pin plugs where the wall is too hard to hammer the pipe clip nail in. (Use 5mm masonry drill.)

| Qty | Code | Price £ |
|-----|----------|---------|
| 25 | FPCPP5-Q | 4.00 |
| 100 | FPCPP5-H | 6.80 |

~ see p52

Barbed Pipe Fittings

New design - Easier to fit but greater resistance to pressure.



Mixed Pack



- · 2 x foldover stopend
- · 2 x connector
- · 2 x tee
- 4 x elbow

| mm | Code | Price £ |
|----|---------|---------|
| 12 | FBM12-T | 6.40 |
| 16 | FBM16-T | 6.00 |
| 20 | FBM20-T | 6.80 |

Stopend



| With Cap | | | | | |
|----------|----------|---------|----------|---------|--|
| mm | Qty 10 | Price £ | Qty 100 | Price £ | |
| 16 | FBSE16-T | 13.00 | FBSE16-H | 112.00 | |
| 20 | FBSE20-T | 13.00 | FBSE20-H | 112.00 | |



| | Fold Over | | | | |
|----|-----------|---------|---------|---------|--|
| mm | Qty 10 | Price £ | Qty 100 | Price £ | |
| 12 | TJ12-T | 3.10 | TJ12-H | 28.00 | |
| 16 | TJ16-T | 2.10 | TJ16-H | 17.00 | |
| 20 | TJ20-T | 2.80 | TJ20-H | 22.00 | |

Connector



| mm | Qty 10 | Price £ | Qty 100 | Price £ |
|----|---------|---------|---------|---------|
| 12 | FBK12-T | 4.40 | FBK12-H | 33.00 |
| 16 | FBK16-T | 4.50 | FBK16-H | 35.00 |
| 20 | FBK20-T | 4.5 | FBK20-H | 35.00 |

Reducing Connector



| | mm | Qty 10 | Price £ | Qty 100 | Price £ |
|---|-------|------------|---------|------------|---------|
| À | 16-12 | FBK16-12-T | 4.50 | FBK16-12-H | 35.00 |
| | 20-16 | FBK20-16-T | 4.90 | FBK20-16-H | 39.00 |

Tee



| mm | Qty 10 | Price £ | Qty 100 | Price £ |
|----|---------|---------|---------|---------|
| 12 | FBT12-T | 6.30 | FBT12-H | 49.00 |
| 16 | FBT16-T | 5.30 | FBT16-H | 44.00 |
| 20 | FBT20-T | 6.00 | FBT20-H | 48.00 |

Tee Reducing Branch

Qty 10





Tee Male Branch

| mm | 1/2"M Qty 10 | ¾"M Qty 10 | Price £ |
|----|--------------|------------|---------|
| 16 | FBT16-2-T | FBT16-3-T | 7.90 |
| 20 | FBT20-2-T | FBT20-3-T | 8.30 |

Male Connector



| mm | ½"M Qty 10 | 34"M Qty 10 | Price £ |
|----|------------|-------------|---------|
| 12 | | FBK12-3-T | 5.30 |
| 16 | FBK16-2-T | FBK16-3-T | 4.90 |
| 20 | FBK20-2-T | FBK20-3-T | 5.80 |

Price £ Qty 100

7.10 FBT16-12-H

7.30 FBT20-16-H

Price £

61.00

63.00

Elbow



| mm | Qty 10 | Price £ | Qty 100 | Price £ |
|----|---------|---------|---------|---------|
| 12 | FBE12-T | 5.60 | FBE12-H | 44.00 |
| 16 | FBE16-T | 4.90 | FBE16-H | 40.00 |
| 20 | FBE20-T | 5.60 | FBE20-H | 47.00 |

Elbow x 3/4" Male



| mm | Qty 10 | Price £ |
|----|-----------|---------|
| 16 | FBE16-3-T | 7.20 |
| 20 | FBE20-3-T | 7.20 |

Valve - Plastic



| mm | poly x poly | 3/4"M x poly | Price £ |
|------------------------|-------------|--------------|---------|
| 6 | FBV6-T* | | 4.20 |
| 12 | FBV12 | | 1.60 |
| 16 | FBV16 | FBV3-16 | 1.90 |
| 20 | FBV20 | FBV3-20 | 1.90 |
| *FBV6-T is a bag of 10 | | | |
| | | | |

Sold singly

Female Connector



| Sold | mm | 34"F |
|--------|----|----------|
| singly | 16 | FBK16-3F |
| - 05 | 20 | FBK20-3F |

Union fitting allows easy unscrewing. Built in washer.

Never use barbed fittings underground or at full mains pressure – they are cheap and cheerful but not as reliable as compression fittings. For larger sizes use compression fittings, p42.

Price £ 0.90 1.00

Compression Fittings for Metric Polythene Pipe



Coupling



| mm | Code | Price £ |
|-------|----------|---------|
| 20 | FLK20 | 3.30 |
| 25 | FLK25 | 3.90 |
| 25-20 | FLK25-20 | 4.30 |
| 32 | FLK32 | 5.10 |
| 32-20 | FLK32-20 | 5.80 |
| 32-25 | FLK32-25 | 6.10 |
| 50 | FLK50 | 13.00 |
| 63 | FLK63 | 19.00 |

Stopcock



| Plasson | | | |
|---------|--------|---------|--|
| mm | Code | Price £ | |
| 20 | FLSC20 | 30.00 | |
| 25 | FLSC25 | 33.00 | |
| 32 | FLSC32 | 44.00 | |
| 1" BSPF | FLSC4 | 25.00 | |
| 32 | FLSC32 | 44.00 | |

Pipe Liner

For blue water pipe.



| mm | Code | Price £ |
|----|-------|---------|
| 20 | PEL20 | 1.20 |
| 25 | PEL25 | 1.50 |
| 32 | PEL32 | 1.50 |
| 50 | PEL50 | 3.00 |

Tee Female Branch



| mm | ¾"F | 1"F | 1½"F | Price £ |
|----|----------|----------|----------|---------|
| 20 | FLT20-3F | | | 3.80 |
| 25 | FLT25-3F | FLT25-4F | | 4.60 |
| 32 | FLT32-3F | FLT32-4F | | 6.40 |
| 50 | | | FLT50-6F | 17.00 |
| 63 | | | FLT63-6F | 28.00 |

Tee



| Fittings | for other sizes |
|-----------|------------------|
| available | to special order |

| | mm | Code | Price £ |
|---|-------|----------|---------|
| | 20 | FLT20 | 4.80 |
| | 25 | FLT25 | 6.10 |
| | 25-20 | FLT25-20 | 6.20 |
| | 32 | FLT32 | 8.90 |
| | 32-25 | FLT32-25 | 8.90 |
| ı | 50 | FLT50 | 18.00 |
| | 63 | FLT63 | 31.00 |
| | | | |

Female Elbow



| mm | ¾"F | 1"F | 1½"F | Price £ |
|----|----------|----------|----------|---------|
| 20 | FLE20-3F | | | 2.50 |
| 25 | FLE25-3F | FLE25-4F | | 3.50 |
| 32 | | FLE32-4F | | 4.10 |
| 50 | | | FLE50-6F | 14.00 |

Elbow



| Price £ | Code | mm | |
|---------|-------|----|--|
| 3.90 | FLE20 | 20 | |
| 4.50 | FLE25 | 25 | |
| 6.30 | FLE32 | 32 | |
| 16.00 | FLE50 | 50 | |
| 22.00 | FLE63 | 63 | |

Male Elbow



| mm | 1⁄2"M | 34"M | 1"M | Price £ |
|----|----------|----------|----------|---------|
| 20 | FLE20-2M | FLE20-3M | | 2.40 |
| 25 | | | FLE25-4M | 3.40 |

Cap and Washer



'O' Ring for easy sealing

| | F | Code | Price £ |
|---|------|------|---------|
| | 1/2" | FMC2 | 1.20 |
| | 3/4" | FMC3 | 1.10 |
| ĺ | 1" | FMC4 | 1.60 |
| | 1½" | FMC6 | 2.10 |
| Ì | 2" | FMC8 | 4.50 |

Male Stud



| ı | mm | ¾"M | 1"M | 1¼"M | 1½"M | 2"M | Price £ |
|---|----|---------|---------|---------|---------|---------|---------|
| | 20 | FLM20-3 | FLM20-4 | | | | 2.20 |
| 1 | 25 | | FLM25-4 | | | | 2.60 |
| 1 | 32 | | FLM32-4 | | | | 3.40 |
| | 50 | | FLM50-4 | FLM50-5 | FLM50-6 | | 8.00 |
| | 63 | | | | FLM63-6 | FLM63-8 | 13.00 |

Pipe Saddle



| Price £ | 16 bar 1"F | 6 bar 1"F | 6 bar ¾"F | mm |
|---------|------------|-----------|-----------|----|
| 1.50 | | | FS25-3 | 25 |
| 1.50 | | FS32-4 | FS32-3 | 32 |
| 2.00 | | | FS50-3 | 50 |
| 7.60 | FS50-4 | | | 50 |
| 9.00 | FS63-4 | | | 63 |

Female Stud



| mm | ¾"F | 1"F | 1½"F | 2"F | Price £ |
|----|---------|---------|---------|---------|---------|
| 20 | FLF20-3 | | | | 2.40 |
| 25 | FLF25-3 | FLF25-4 | | | 2.60 |
| 32 | | FLF32-4 | | | 4.20 |
| 50 | | | FLF50-6 | | 10.00 |
| 63 | | | | FLF63-8 | 14.00 |

Installer Approved! Not only are these fittings WRC approved - our installers think they are the best thing around - and they have tried them all!

PoziLock Fittings

- · Positive sealing
- · Increased pressure resistance

Barbed fittings are a low cost way of connecting low pressure polythene pipe. However, their design means that, occasionally, they may drip. This does not matter on a border but, when clipped to a wall, it can look unsightly. Jubilee clips look a mess and can damage the fitting – making the situation even worse - and high pressure compression fittings are very bulky.

Access have introduced a neat and economical solution – a low pressure compression fitting. With a slim design, these fittings fit into the pipe quickly and neatly and can be easily remade if necessary.



Much easier to fit than barbed fittings - no need for hot water.

Straight



| ı | mm | Code | Price £ |
|---|----|-------|---------|
| ı | 16 | FRK16 | 2.00 |
| | 20 | FRK20 | 2.20 |

Tee



| mm | Code | Price £ |
|----|-------|---------|
| 16 | FRT16 | 3.30 |
| 20 | FRT20 | 3.70 |

Tap Connector



| • | | | |
|---|----|---------|---------|
| | mm | Code | Price £ |
| | 16 | FRF16-3 | 2.20 |
| | 20 | FRF20-3 | 2.20 |

Straight - Male 3/4"



| mm | Code | Price £ |
|----|---------|---------|
| 16 | FRM16-3 | 1.30 |
| 20 | FRM20-3 | 1.30 |

Tee – Male ¾"



| mm | Code | Price £ |
|----|----------|---------|
| 16 | FRT16-3M | 2.70 |
| 20 | FRT20-3M | 3.10 |

On / Off Valve



| mm | Code | Price £ |
|----|-------|---------|
| 16 | FRV16 | 3.60 |
| 20 | FRV20 | 3.70 |

Elbow



| mm | Code | Price £ |
|----|-------|---------|
| 16 | FRE16 | 2.60 |
| 20 | FRE20 | 2.70 |

Tee - Female 3/4"



| mm | Code | Price £ |
|----|----------|---------|
| 16 | FRT16-3F | 3.70 |
| 20 | FRT20-3F | 3.70 |

Barb and Grip Ring

Allows any 3/4" threaded fitting to be used for polythene pipe.



| mm | Colour | Code | Price £ |
|----|--------|-------|---------|
| 16 | Green | FRG16 | 0.90 |
| 20 | Blue | FRG20 | 0.90 |

Manifold Parts



| Built in 'O' | rings | make | cons | tructi | ina |
|--------------|--------|-------|------|--------|-----|
| manifolds | really | anick | and | eacu | |
| MIGHT DIOIS | really | quick | ario | casy. | |



| Tee | Code | Price £ |
|------------------|--------|---------|
| 1" x 1" x 1" | KMAT4 | 4.20 |
| 1" x 1" x 1" FFF | KMAT4F | 6.30 |
| 1½" x 1½" x 1½" | KMAT6 | 20.00 |



| | Union | Code | Price £ |
|---------|---------|-------|---------|
| mbles - | 1" x 1" | KMAU4 | 3.60 |



Price £

14.00

| Elbow | Code | Price £ |
|--------------|---------|---------|
| 1" x 1" FF | KMAE4 | 4.00 |
| 1" x 1" MF | KMAE4MF | 3.00 |
| 1½" x 1½" MF | KMAE6MF | 16.00 |

| Cross Piece | Code | Price £ |
|----------------------|-------|---------|
| 1" x 1" x 1" x 1" | KMAX4 | 5.90 |

| Nipple | Code | Price £ |
|---------|---------|---------|
| 1" x 1" | KMAN4 | 1.60 |
| 1" x ¾" | KMAN4-3 | 1.70 |

| Manifold 1" | Code | Price £ |
|-------------|-------|---------|
| 2 Way | KMAM2 | 9.40 |
| 3 Way | KMAM3 | 14.00 |

Water Meters



All water meters come with threaded tail pieces to allow removal. Install horizontally. Metal body 16 bar pressure rated. Dial indication 1L - 10,000m3.

Meters with electrical output link to Heron panels to allow control by water volume.

| Size | Max Flow | Nominal Flow | Code | Price £ | Electrical Output | Price £ |
|------|----------|-----------------|--------|---------|----------------------|---------|
| 34"M | 5 m³/h | 2.5 m³/h | EWMA3 | 91.00 | EWMA3E~ | 136.00 |
| 1"M | 10 m³/h | 5 m³/h | EWMA4~ | 129.00 | | |

Need to know how much water you are applying? Fit a water meter and keep a check on the readings.

For larger Water **Meters and Metering** Valves contact our Sales Department

PTFE Tape



Gas quality - i.e. very thick and you don't need much. Don't waste money on the normal thin type!

| Code | Price £ |
|---------|---------|
| EPTFE-G | 2.20 |

Pressure Gauge



Option of either 63mm liquid filled gauge or 50mm plastic dry gauge. 1/4" BSPM thread

| Туре | Range | Code | Price £ |
|-----------|------------|---------|---------|
| Stainless | 0 - 10 bar | EPG-10B | 14.00 |
| Plastic | 0 - 7 bar | EPG-07B | 7.10 |

Tool Kit



The complete starter set for installing irrigation systems. Includes tool box, chamfering tool, pipe cutters and 'C' spanner.





Chamfering Tool For pipe 16mm -63mm. Bevel ends of pipe for easier fitting.

Pressure Test Kit



Ideal for pressure testing water supplies.

| Code | Price £ |
|--------|---------|
| EPTEST | 14.00 |


'C' Spanner For fittings up to 40mm


| | Code | Price £ |
|-------------|--------|---------|
| Kit | KHTK | 55.00 |
| Cutters | FLCUT | 17.00 |
| Chamfer | FLCHAM | 25.00 |
| 'C' Spanner | FLSP | 13.00 |

Warning Label

CAUTION

DO NOT DRINK







Saddle Hole Cutter



Ideal for cutting holes for saddles. Fit saddle. before cutting hole. 15mm hole size

| Code | Price £ |
|-------|---------|
| FLSAD | 39.00 |

Threaded Valves and Taps

Ball Valve



PVC single or double plastic unions. Full bore ball valve

| VDL | | | |
|------|--------|---------|--|
| F | Code | Price £ | |
| 1/2" | EVLUT2 | 14.00 | |
| 3/4" | EVLUT3 | 17.00 | |
| 1" | EVLUT4 | 21.00 | |
| 1½" | EVLUT6 | 33.00 | |
| 2" | EVLUT8 | 53.00 | |

Gate Valve



Brass. More frost resistant than a ball valve. More controllable flow.

| | Code | Price £ |
|------|------|---------|
| 3/4" | EVG3 | 12.00 |
| 1" | EVG4 | 15.00 |
| 1½" | EVG6 | 30.00 |
| 2" | EVG8 | 46.00 |

Check Valve & Strainer



Brass. Conical seating, not a cheap leaky flap.

| | | F | Code | Price £ |
|---|---------------|-------|-------|---------|
| | | 3/4" | EVC3 | 12.00 |
| | Check Valve | 1" | EVC4 | 16.00 |
| | | 11/2" | EVC6 | 36.00 |
| | Check Valve | 1" | EVFS4 | 27.00 |
| W | with strainer | 1½" | EVFS6 | 48.00 |
| | Strainer only | 1" | EVS4 | 4.80 |

Stopcock



Conforms to Water Regulations when used above ground. See p42 for below ground stop cocks.

| F | Code | Price £ |
|------|-------|---------|
| 1/2" | EVSC2 | 15.00 |
| 3/4" | EVSC3 | 27.00 |

Lever Valve



Brass Full bore ball valve allows maximum flow.

| F | Code | Price £ |
|------|------|---------|
| 1/2" | EVL2 | 13.00 |
| 3/4" | EVL3 | 19.00 |
| 1" | EVL4 | 23.00 |

Ice Valve



Frost resistant to -20°C. Ideal for outdoor taps.

| Inlet | Outlet | Code | Price £ |
|-------|--------|-------|---------|
| 1/2" | 3/4" | EVFV2 | 26.00 |
| 3/4" | 1" | EVFV3 | 38.00 |

Double Check Valve



Complies with water regulations.

| F | Code | Price £ |
|------|-------|---------|
| 1/2" | EVCV2 | 35.00 |
| 3/4" | EVCV3 | 65.00 |

Wall Plate



Wall plate with built-in compression fitting.

| mm-F | | Code | Price £ |
|-------------------|---------|---------|---------|
| 15mm Conex x 1/2" | Brass | EWP15-2 | 4.10 |
| 20mm MDPE x 1/2" | Plastic | EWP20-2 | 6.30 |
| 25mm MDPE x ¾" | Plastic | EWP25-3 | 9.00 |

For warning label see page 44.





½" Bib Tap

1/2" M inlet, 1/2" hose union outlet. Built in check valve to comply with water regulations. 34" M threaded outlet accepts guick connectors or 'Geka'.

| | Code | Price £ |
|----------------------------|-------|---------|
| With Double Check Valve | ETBC2 | 20.00 |
| Without Double Check Valve | ETB2 | 14.00 |



3/4" Bib Tap

34" M inlet, 34" hose union outlet. Designed for higher flows. 7/8" M threaded outlet accepts 'Geka' 7/8" F

adaptor FGBF78.

FCTI3-78 adapter converts 7/8" thread to 34" male thread

| Price £ |
|---------|
| 36.00 |
| 9.80 |
| 18.00 |
| |

Quick Coupling Valve and Take Off

Quick couplings are ideal for garden centres and landscape areas. Fit the valve in the ground, then whenever you wish to water, plug in the take-off, and you will be supplied with water automatically. The water shuts off again when the take-off is removed.

Valve: Plastic - hinged cap. 34"M Take off: Plastic - 34"M

| | M | Code | Price £ |
|----------|------|--------|---------|
| Valve | 3/4" | EVQC | 10.00 |
| Take-off | 3/4" | EVQCTO | 4.90 |







uPVC Pipe and Fittings-Metric

uPVC Pipe



| mm | 10 Bar | Price £ |
|----|------------|---------|
| 20 | PM20-1M | 4.60 |
| 20 | PM20-1.25M | 1.40 |
| 25 | PM25-2.5M | 7.20 |
| 32 | PM32-2.5M | 10.00 |
| 50 | PM50-2.5M | 18.00 |

Drilled Pipe

| mm | Length | Holes | Code | Price £ |
|--------------------------------|--------|-----------------------|-----------|---------|
| 25 | 2.54m | 1 x ⁷ /16" | PM25-2.5A | 7.70 |
| For 7/16" adaptors see L04 p47 | | | | |

Drain Valve



| | | Code | Price £ |
|-----------|------------|---------|---------|
| 32mm 1¼"F | With Elbow | FMDVE32 | 5.70 |

mm

25 FME25

32 FME32

FME50

Valve



| mm | Code | Price £ |
|----|--------|---------|
| 20 | EVLU20 | 9.40 |
| 25 | EVLU25 | 11.00 |
| 32 | EVLU32 | 13.00 |
| 50 | EVLU50 | 22.00 |
| | | |

Elbow 90°



| Genuine |
|----------|
| VDL |
| Fittings |

| | | Elbow x F |
|-------|---------|-----------|
| Code | Price £ | |
| FME20 | 1.00 | |

1.10

1.20

2.30



Glued x 1" Female

| mm | Code | Price £ |
|----|----------|---------|
| 32 | FME32-4F | 3.00 |

Connector



All of the FMK connectors (except for FMK20-3) will fit inside a fitting one size larger. i.e. FMK25-3 will fit into a FMT32 tee.

| | , | |
|-------|---------|-----------|
| Price | Code | mm |
| 0. | FMK20-3 | 20 - ¾"M |
| 0. | FMK25-3 | 25 - ¾"M |
| 0. | FMK25-4 | 25 - 1"M |
| 0. | FMK32-3 | 32 - ¾"M |
| 0. | FMK32-4 | 32 - 1"M |
| 2. | FMK50-4 | 50 - 1"M |
| 2. | FMK50-6 | 50 - 1½"M |

Filter Pack



1"F x 1"M

| mm | Code | Price £ |
|----|------|---------|
| 32 | LUFP | 24.00 |

Socket



| mm | Code | Price £ |
|----|-------|---------|
| 20 | FMS20 | 0.70 |
| 25 | FMS25 | 0.70 |
| 32 | FMS32 | 0.80 |
| 50 | FMS50 | 1.50 |

Cap & Washer



VDL or PALAPLAST

| | Code | Price £ |
|------|------|---------|
| ½"F | FMC2 | 1.20 |
| 34"F | FMC3 | 1.10 |
| 1"F | FMC4 | 1.60 |
| 1½"F | FMC6 | 2.10 |
| 2"F | FMC8 | 4.50 |

Socket x F



| mm | Code | Price £ |
|-----------|----------|---------|
| 20 - ½"F | FMS20-2F | 1.60 |
| 25 - ¾"F | FMS25-3F | 1.90 |
| 32 - 1"F | FMS32-4F | 3.20 |
| 50 - 1½"F | FMS50-6F | 4.40 |

Socket (Metric to Imperial)



| | Code | Price £ |
|-------|----------|---------|
| 25-¾" | FMIS25/3 | 0.70 |
| 32-1" | FMIS32/4 | 0.80 |

Tee x M, x F





| mm | | Code | Price £ |
|-----------|------------------|----------|---------|
| 20 - ½"F | | FMT20-2F | 2.40 |
| 25 - ¾"F | Female Branch | FMT25-3F | 2.40 |
| 32 - 1"F | Dianon | FMT32-4F | 3.20 |
| 32 - 1¼"M | Male Branch | FMT32-5 | 1.50 |

Tee



| mm | Code | Price £ |
|----|-------|---------|
| 20 | FMT20 | 1.30 |
| 25 | FMT25 | 1.30 |
| 32 | FMT32 | 1.20 |
| 50 | FMT50 | 2.80 |
| | | |



Reducing Bush



| - | mm | Code | Price £ |
|---|---------|----------|---------|
| | 25 - 20 | FMR25-20 | 0.90 |
| | 32 - 25 | FMR32-25 | 0.90 |
| | 50 - 32 | FMR50-32 | 1.70 |
| | 50 - 40 | FMR50-40 | 1.30 |
| | 63 - 50 | FMR63-50 | 2.00 |

We use VDL fittings - acknowledged to be the best. Repairing joints can be a nightmare without VDL.

Union



| mm | Code | Price £ |
|----|-------|---------|
| 20 | FMU20 | 3.80 |
| 25 | FMU25 | 4.80 |
| 32 | FMU32 | 5.90 |
| 50 | FMU50 | 7.20 |

Union x M



| mm | Code | Price £ |
|-----------|---------|---------|
| 25 - ¾"M | FMU25-3 | 5.40 |
| 32 - 1"M | FMU32-4 | 6.70 |
| 50 - 1½"M | FMU50-6 | 8.30 |

Miscellaneous Fittings

Glue and Brush*





| | Data | sheet | available |
|--|------|-------|-----------|
|--|------|-------|-----------|

| | Туре | Code | Price £ |
|-------|------|----------|---------|
| 125ml | UNI | FMCEM100 | 9.90 |
| 250ml | S3 | FMCEM250 | 20.00 |
| 1 L | S3 | FMCEM1L | 55.00 |

Cleaner



Data sheet available.

Always use pipe cleaner on joints prior to gluing.

| | Code | Price £ |
|-------|----------|---------|
| 250ml | FMCLE250 | 9.70 |
| 650ml | FMCLE650 | 17.00 |

Galvanised Wire



| Weight/A | pprox Length | Code | Price £ |
|----------|--------------|----------|---------|
| 0.5kg | 30M/100' | ESW-0.5K | 5.50 |
| 2.5kg | 64M/210' | ESW-2.5K | 27.00 |

Wire Strainer



No 2 size.

| Code | Price £ |
|------|---------|
| EWS | 2.10 |

Ratchet Strap Black Nylon



| Pipe size to wire mm | Pipe size to 32mm ridge | Pipe size to 63mm ridge | Max diameter circle mm | Useable length mm | Width mm | 25 pack | Price £ | 100 pack | Price £ |
|----------------------------|-------------------------------|-------------------------------|------------------------------|----------------------|----------|----------|---------|----------|---------|
| 20 | | | 23 | 75 | 2.4 | | | FPC100-H | 1.50 |
| 25 & 32 | | | 35 | 110 | 3.6 | FPC150-Q | 2.30 | FPC150-H | 4.00 |
| 40 | 25 | | 50 | 172 | 3.6 | FPC200-Q | 3.00 | FPC200-H | 6.80 |
| | 32 | 25 & 32 | 60 | 270 | 4.8 | FPC300-Q | 4.10 | FPC300-H | 11.00 |

Adaptor for Drilled Pipe



L04: KEPW adaptor and KCWR ring drill 7/16" (11mm) hole in uPVC, or use pre-drilled pipe.

Takes downtubes or 6mm sprinklers.

| Qty | Code | Price £ |
|-----|-------|---------|
| 10 | L04-T | 5.00 |
| 100 | L04-H | 40.00 |

Downtubes

Downtube, weight, collar, plunger. Collar fits L04, or KEPW, KEPM adaptor. Bottom plunger takes 6mm M sprinklers.

| Length | Qty | Code | Price £ |
|--------|-----|-----------|---------|
| 0.3m | 10 | L41-0.3-T | 8.10 |

Downtube Weight

Helpful Selection Guide





Plain tube 6.8 x 4mm flexible PVC.

| Length | Code | Price £ |
|--------|----------|---------|
| 100m | P59-100M | 75.00 |

Drip-Stop Valve



1.1 bar opening pressure. 6mm F x 6mm M. Can be used either way round.

| Qty | Code | Price £ |
|-----|--------|---------|
| 10 | KENV-T | 11.00 |
| 100 | KENV-H | 99.00 |



Irrigation is vital if surfaces are to be kept green and playable. As well as a wide range of sprinklers and controllers, we can advise on water storage, pumps and supply pipework. These pages contain a sample of the products we offer – a wider range of products, and full data sheets are available online.



Hunter I-40



The worlds No 1 sprinkler for sports, the I-40 is tough and reliable

Radius: 13.4m - 21.6m Flow Rate: 1.52 - 6.55m³/hr Pressure: 2.5 - 6.5 bar

Popup height: 4"1" BSPF thread

| | Code ~ | Price £ |
|------------------------|---------|---------|
| I-40 adjustable | KHP40 | 94.00 |
| Box of 10 adjustable | KHP40BX | 730.00 |
| 8" swing joint 1" x 1" | KHSJ8-4 | 41.00 |

| Nozzle | Bars | Radius | m³/hr |
|--------|------|--------|-------|
| 40 | 4.5 | 14.0m | 2.03 |
| 41 | 5.0 | 15.8m | 2.79 |
| 42 | 5.0 | 16.8m | 3.01 |
| 43 | 5.0 | 18.0m | 3.75 |
| 44 | 6.0 | 20.1m | 5.56 |
| 45 | 6.0 | 21.3m | 6.28 |

Performance data for I-40 adjustable

Rainbird 950E



Multi-jet sprinkler for Bowling Greens and Golf courses. Valve in head design.

· Radius: 21.9m - 27.4m

· Flow Rate: 5.22 - 9.20m3/hr

· Pressure: 4.1 - 6.9 bar

· Arc: 40° – 345°

· Popup height: 6cm

| | Code ~ | Price £ |
|----------------------|--------|---------|
| 950E with #22 nozzle | KB950E | 414.00 |
| #20 grey nozzle | KBN20 | 11.00 |
| #24 yellow nozzle | KBN24 | 11.00 |

| Nozzle | Bars | Radius | m³/hr |
|--------|------|--------|-------|
| 20 | 4.1 | 21.9m | 5.22 |
| 20 | 6.9 | 25.6m | 6.93 |
| 22 | 4.1 | 22.6m | 6.02 |
| 22 | 6.9 | 25.6m | 7.86 |
| 24 | 4.1 | 23.2m | 7.00 |
| 24 | 6.9 | 27.4m | 9.20 |

Carson Valve Box



Heavier duty Valve Boxes for Sports Fields.

| | Box | Price £ | Spare Lid | Price £ | Metal Cover ~ | Price £ |
|-----------|--------|---------|-----------|---------|---------------|---------|
| 10" Round | KHC10 | 23.00 | KHC10LID | 8.70 | | |
| Standard | KHCSTD | 49.00 | KHCSTDLID | 20.00 | KHCSTDLM | 147.00 |
| Jumbo | KHCJMB | 66.00 | KHCJMBLID | 27.00 | KHCJMBLM | 169.00 |







Irritec Valve Boxes

| Imperial Size | Lid Diameter | Base Diameter | Height | Code | Price £ | Spare Lid | Price £ |
|--------------------|-----------------|------------------|--------|---------|---------|--------------|---------|
| 10" round | 23cm | 30cm | 25cm | KHB10 | 11.00 | KHB10LID | 4.90 |
| 12" x 18" Standard | 38 x 25cm | 47 x 33cm | 30cm | KHB1218 | 27.00 | KHB1218LID | 15.00 |
| 12" x 22" Jumbo | 50 x 34cm | 60 x 45cm | 30cm | KHB1420 | 53.00 | KHB1420LID | 28.00 |







For warning label see page 44.







Bowling Green Package

NEW


Fully automated watering for a top quality surface

For the best results with the minimum of effort an automated popup sprinkler system can be installed. This package includes 4 popup sprinklers, each one located half way down the side of the green, pipework that is located in the roll off gutter and a pump, tank and automatic controller. A rain sensor is also included to reduce watering costs.

A full specification and layout plan is available on our website.

What you get

- 5,000 litre irrigation storage tank with mains water connection and Water Regulation compliance kit
- Multi-stage stainless steel pump with autostart, pre-assembled and tested
- · Irrigation controller with rain sensor
- Pipework from pump to green with necessary fittings
- 4 Popup sprinklers

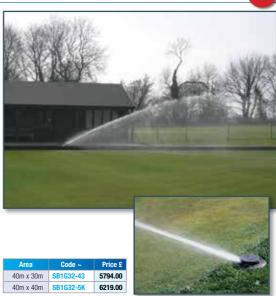

Manège Package


NEW

Automated dust suppression

Large sprinklers are located around the perimeter fencing, throwing water into the manège. Includes pipework and a pump and storage tank. An automatic controller will bring the irrigation system on early in the morning to water the manège, keeping dust levels down. A full specification and layout plan is available on our website.

What you get

- · Large tank to comply with the Water Regulations
- Single phase pump unit to provide the appropriate pressure
- Pipework and valve boxes for perimeter watering
- Automatic controller with the option of wi-fi connectivity





~ see p52

Rain King Travelling Sprinkler

NEW

Ideal for keeping pitches watered during dry weather, watering half of the pitch at a time.

The travelling sprinkler is placed at one end of the pitch and the steel wire run out to the other end of the pitch. Once operating the sprinkler slowly travels down the length of the pitch, shutting off once it has reached the other end. Watering can be done at night to minimise evaporation. One half of the pitch is watered each time, so an entire pitch can be watered over two nights.

Flow: 3.000 - 4.100 l/h.

Diameter: 34 - 38m @ 3 - 7 bar Pumped supply normally required.

135m steel cable allows 183m long watering run.

3/4" BSPF inlet fitting - use 1" hose to minimise pressure losses.

| Code ~ | Price £ |
|--------|---------|
| EHTS4 | 1255.00 |









Travelling Sprinkler Package



Provides pressure and flow for watering pitch

Travelling sprinklers normally require a pumped system to provide sufficient pressure and flow due to the large amounts of water required to water a pitch.

A large water storage tank fills when the system is not operating, allowing the pump to irrigate half of the pitch overnight. The process is then repeated the next night on the other half.

Incudes 50m of underground pipe to run from the pump to the valve box at the end of the pitch.

A full specification and layout plan is available on our website.





What you get

- · Travelling sprinkler
- · 100m hose and heavy duty trolley
- Hydrant box and 50m underground pipe
- · Single phase auto-start pump
- · 20.800 litre tank with air gap



Sports Pitch Strip Sprinkler Package



A low cost method of watering a complete football or Rugby pitch in 10 days using a standard water supply.

Two options are available, for grounds where the pressure and flow are good the system can be run directly from the mains water supply; for faster watering or for poorer supplies a pumped system is available.

The package consists of temporary sprinklers run across the width of the pitch.

The pumped system also includes an underground pipe to run down one side line with 5 take-off points.

| | Code ~ | Price £ |
|--------|--------|---------|
| Mains | STPW6 | 2754.00 |
| Pumped | STPW-P | 5504.00 |


What you get (mains)

- · 6 sprinkler sleds to cover pitch width
- · Connecting hose and 2 hose reel carriers
- · 2-zone battery controller to water 3 sprinklers at a time

What you get (pumped)

- · 7 sprinkler sleds to cover pitch width
- · Connecting hose and hose reel carrier
- · 5 take-off points and 150m underground pipe



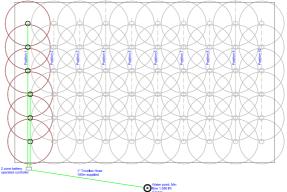

Reel Irrigators



Reel irrigators are designed to water large grass surfaces such as playing fields or football or rugby pitches. Units will require a water storage tank and pump to provide enough pressure. Reel irrigators incorporate a drum of hose which is unwound manually. Once the irrigator is operating, the hose will automatically be pulled along the grass until it returns to the unit.

Speedy Rain 32/90

Hose diameter x length: 32mm x 90m Output range: 1.68 - 3.60 m3/hr Connection pressure: 3.5 - 5.0 bar

Wetted width: 26 - 37m

Rewind speed: 10 - 30 meters / hour

| Code ~ | Price £ |
|--------|---------|
| FHRI32 | 3247 00 |



Speedy Rain 40/130

Hose diameter x length: 40mm x 130m Output range: 2.94 - 7.44 m³/hr Connection pressure: 4.4 - 8.0 bar

Wetted width: 26 - 44m

Rewind speed: 10 - 40 meters / hour

| Code ~ | Price £ |
|--------|---------|
| EHRI40 | 6082.00 |



see p52

Order Information

Terms and Conditions

These Terms of Business are in addition to our Terms and Conditions of Sale. All orders placed with Access are subject to our Terms and Conditions of Sale unless agreed in writing by a director of Access Irrigation Ltd. A full copy of the Terms and Conditions of Sale is available on request.

Placing your Order

Please indicate the quantities, reference code and description on all orders. Please also include a contact phone number.

Phone: 01788 823811

We are open Monday - Friday 8.30am - 5.00pm or leave a message outside office hours.

Email: sales@access-irrigation.co.uk

A convenient way to order, 24 hours a day.

Online: www.access-irrigation.co.uk

All components are listed online for fast and easy ordering.

Collection

For a speedy service, phone your order through beforehand.

Payment Terms

New Customers

We require payment with order.

Existing Customers

Existing customers may open a credit account - details are available on request.

We accept payment by

Cheque, or the following credit and debit cards.









Damaged Goods

Any goods delivered damaged must be signed for as damaged and notified to us in writing, within 5 days; otherwise no claims can be accepted.

E&OE: Access reserve the right to change products and prices at any time. No part of this Catalogue may be reproduced by any method without prior permission from Access Irrigation Ltd.

FREE Economy Delivery

Catalogue orders over £125 (ex VAT) will be despatched by post or carrier free of charge if paid by credit / debit card.

This service will normally take 3 – 5 working days longer than the Standard service. The order will generally be held until all items are ready for despatch.

Direct despatch (~) items and bulky/high value items are excluded.

STANDARD Delivery

Our standard service ensures that orders are normally despatched within 48 hours (over 85% are despatched in 24 hours). Items are despatched using fully traceable 24hr carriers.

Delivery charges for orders paid for by credit/debit card:

£0 - £250 **£12.95**

£250 + £19.95

For a faster service, orders will be part despatched if any items are out of stock.

Direct despatch (~), special order (+), heavy and bulky items may take longer and may attract a surcharge.

NEXT DAY Delivery

For really urgent orders, we can arrange for a next day delivery service for items in stock. Please ring through your order to check the stock situation. A delivery surcharge will apply.

Other Terms

Deliveries to remote areas (eg. Scottish highlands), Northern Ireland, Eire and non-mainland addresses will be charged at cost.

Orders under £125

For non-priority orders under £125, paid by credit / debit card, the following charges apply:

Under 1kg 1st class post £4.95

Over 1kg Economy carrier £9.95

Special Terms

Items marked + in the catalogue will be made/purchased to order, and may take a little longer to despatch.

Items marked ~ are purchased to order so orders with these items may take a little longer to despatch.

| Air gap tank | 36 |
|--|---|
| Amber mist nozzle | 9 |
| Anchorage pegs | 20 |
| В | |
| Bag dilutor | 2 |
| Ball valve Ball valve and float | 45 |
| Barbed fittings | 41 |
| Barbed valve | 41 |
| Battery operated controller | 28 |
| Bayonet hose connectors | 14 |
| Bedding spike | 11 |
| Bermad solenoid valve | 30 |
| Bib tap | 45 |
| Blanking plug | 38 |
| Bluetooth controller | 28 |
| Border link kit | 23 |
| Border watering kit (drip) | 23 |
| Border watering kit (sprinkler) | 18-19 |
| Bore hole pumps | 34 |
| Bowling green package | 49 |
| Brass quick connectors | 17 |
| C | 4.4 |
| 'C' spanner Cable | 31 |
| Cable tie | 47 |
| Cap and washer | 39,42 |
| Carson valve boxes | 48 |
| Chamfering tool | 44 |
| Check valve | 45 |
| Cleaner-pipe | 47 |
| Clip-pipe | 40 |
| Coils (solenoid) | 30 |
| Compression fittings | 42 |
| Contractor hanging basket kits | 27 |
| Control Systems | 28-31 |
| D | |
| | - |
| DB Valve | |
| Decoder cable | 31 |
| Decoder cable Decoders | 31 29 |
| Decoder cable Decoders Dilutors | 31 29 2 |
| Decoder cable Decoders Dilutors Disc filters | 31 29 2 36 |
| Decoder cable Decoders Dilutors | 31 29 2 36 45 |
| Decoder cable Decoders Dilutors Disc filters Double check valve Downtubes | 31 29 2 36 45 47 |
| Decoder cable Decoders Dilutors Disc filters Double check valve | 31 29 2 36 45 47 |
| Decoder cable Decoders Dilutors Disc filters Double check valve Downtubes Downtubes | 31 29 2 36 45 47 47 |
| Decoder cable Decoders Dilutors Disc filters Double check valve Downtubes Downtube weight Drain valve | 31 29 2 36 45 47 47 47 20-21 |
| Decoder cable Decoders Dilutors Disc filters Double check valve Downtubes Downtube weight Drain valve Drip lines | 31 29 2 36 45 47 47 46 20-21 |
| Decoder cable Decoders Dilutors Disc filters Double check valve Downtubes Downtubes Downtube weight Drain valve Drip lines Drip tape | 31 29 2 36 45 47 47 46 20-21 |
| Decoder cable Decoders Dilutors Disc filters Double check valve Downtubes Downtube weight Drain valve Drip lines Drip tape Dripper kit | 31 29 2 36 45 47 47 46 20-21 6 |
| Decoder cable Decoders Dilutors Disc filters Double check valve Downtubes Downtube weight Drain valve Drip lines Drip tape Dripper kit Dripper lead | 31 29 2 36 45 47 47 46 20-21 6 |
| Decoder cable Decoders Dilutors Disc filters Double check valve Downtubes Downtube weight Drain valve Drip lines Drip tape Dripper lead Dripper with shutoff Drippers Drip-stop valve | 31 29 36 45 47 47 46 20-21 6 20 |
| Decoder cable Decoders Dilutors Disc filters Double check valve Downtubes Downtube weight Drain valve Drip lines Drip tape Dripper kit Dripper with shutoff Drippers Drippers Drippers Drippers Drippers Dripper yalve | 31 29 2 36 45 47 47 46 20-21 6 20 4 |
| Decoder cable Decoders Dilutors Disc filters Double check valve Downtubes Downtubes Downtube weight Drain valve Drip lines Drip tape Dripper kit Dripper lead Dripper with shutoff Drippers Drip-stop valve | 31 29 2 36 45 47 47 46 20-21 6 20 4 4 4 47 |
| Decoder cable Decoders Dilutors Disc filters Double check valve Downtubes Downtubes Downtube weight Drain valve Drip lines Drip tape Dripper kit Dripper lead Dripper with shutoff Drippers Drip-stop valve E Eindor fittings | 31 29 36 45 47 47 46 20-21 6 20 4 4 4 47 |
| Decoder cable Decoders Dilutors Dilutors Dibit filters Double check valve Downtubes Downtube weight Drain valve Drip lines Drip tape Dripper kit Dripper lead Dripper sith shutoff Drippers Drip stop valve E Eindor fittings Eindor sprinklers Espa pumps | 31 29 36 45 47 47 46 20-21 6 20 4 4 4 47 |
| Decoder cable Decoders Dilutors Dilutors Dibitors Dibitors Dibitors Dibitors Double check valve Downtubes Downtubes Downtube weight Drain valve Drip lines Drip tape Dripper kit Dripper lead Dripper with shutoff Drippers Drip-stop valve E Eindor fittings Eindor sprinklers Espa pumps F | 313 25 25 2 2 2 2 3 2 2 3 2 2 3 2 2 3 2 2 3 2 2 3 2 2 3 2 2 3 2 2 3 2 2 3 2 2 3 2 2 3 2 2 3 2 2 3 2 2 3 2 2 3 2 2 3 2 2 3 2 |
| Decoder cable Decoders Dilutors Dilutors Dibit filters Double check valve Downtubes Downtube weight Drain valve Drip lines Drip tape Dripper kit Dripper lead Dripper sith shutoff Drippers Drip stop valve E Eindor fittings Eindor sprinklers Espa pumps | 29 2 36 45 47 47 46 |

| E | _ |
|--|--|
| Flexidrip | <u>5</u> 31 |
| Floating level switch | 31 |
| Galconette battery controller | 28 |
| Gate valve | 45 |
| 'Geka' hose fittings | 14-15 |
| Glue (uPVC) | 47 |
| Grease filled connectors | 31 |
| Greenhouse watering | 3 |
| Н | |
| Half circle sprinkler | 10 |
| Hand Watering | 14-17 |
| Hanging basket feeder | 27 |
| Hanging basket watering | 26-27 |
| Heavy duty hose reel | 16 |
| Heron panel | 30 |
| Hose clips | 15 |
| Hose couplers | 15 |
| Hose hanger | 16 |
| Hose pipe | 15 |
| Hose reels | 16 |
| Humidity sensor | 30 |
| Hunter controllers Hunter pop-up sprinklers | 29 24-25,48 |
| Hunter shrub sprinkler | 11 |
| Hunter solenoid valve | 30 |
| I I I I I I I I I I I I I I I I I I I | |
| Ice valve | 45 |
| J | |
| Jubilee Clips | 15 |
| L | |
| Lancas | |
| Lances | 14 |
| Landscape Watering | 18-27 |
| Landscape Watering Large spiked riser | 18-27 |
| Landscape Watering Large spiked riser Lawn kit | 18-27 13 22 |
| Landscape Watering Large spiked riser Lawn kit Level switch | 18-27 13 22 31 |
| Landscape Watering Large spiked riser Lawn kit Level switch Lever valve | 18-27 13 22 31 45 |
| Landscape Watering Large spiked riser Lawn kit Level switch Lever valve Light sensor | 18-27 13 22 31 45 30 |
| Landscape Watering Large spiked riser Lawn kit Level switch Lever valve Light sensor Liquid Feeding | 18-27 13 22 31 45 30 2-3 |
| Landscape Watering Large spiked riser Lawn kit Level switch Lever valve Light sensor Liquid Feeding Low voltage cable | 18-27 13 22 31 45 30 |
| Landscape Watering Large spiked riser Lawn kit Level switch Lever valve Light sensor Liquid Feeding Low voltage cable | 18-27 13 22 31 45 30 2-3 31 |
| Landscape Watering Large spiked riser Lawn kit Level switch Lever valve Light sensor Liquid Feeding Low voltage cable M Maclow clips | 18-27 13 22 31 45 30 2-3 31 |
| Landscape Watering Large spiked riser Lawn kit Level switch Lever valve Light sensor Liquid Feeding Low voltage cable M Maclow clips Mains operated controller | 18-27 13 22 31 45 30 2-3 31 40 29,30 |
| Landscape Watering Large spiked riser Lawn kit Level switch Lever valve Light sensor Liquid Feeding Low voltage cable M Maclow clips Mains operated controller Manifold fittings | 18-27 13 22 31 45 30 2-3 31 40 29,30 43 |
| Landscape Watering Large spiked riser Lawn kit Level switch Lever valve Light sensor Liquid Feeding Low voltage cable M Maclow clips Mains operated controller Manifold fittings Manifold taps | 18-27 13 22 31 45 30 2-3 31 40 29,30 43 17,23 |
| Landscape Watering Large spiked riser Lawn kit Level switch Lever valve Light sensor Liquid Feeding Low voltage cable M Maclow clips Mains operated controller Manifold fittings | 18-27 13 22 31 45 30 2-3 31 40 29,30 43 |
| Landscape Watering Large spiked riser Lawn kit Level switch Lever valve Light sensor Liquid Feeding Low voltage cable M Maclow clips Maniso operated controller Manifold fittings Manifold taps MDPE pipe | 18-27 13 22 31 45 30 2-3 31 40 29,30 43 17,23 40 |
| Landscape Watering Large spiked riser Lawn kit Level switch Lever valve Light sensor Liquid Feeding Low voltage cable M Maclow clips Mains operated controller Manifold fittings Manifold taps MDPE pipe Menage package | 18-27 13 22 31 45 30 2-3 31 40 29,30 43 17,23 40 49 |
| Landscape Watering Large spiked riser Lawn kit Level switch Lever valve Light sensor Liquid Feeding Low voltage cable M Maclow clips Mains operated controller Manifold fittings Manifold taps MDPE pipe Menage package Mini click sensor | 18-27 13 22 31 45 45 30 2-3 31 40 29,30 43 17,23 40 49 29 |
| Landscape Watering Large spiked riser Lawn kit Level switch Lever valve Light sensor Liquid Feeding Low voltage cable M Maclow clips Mains operated controller Manifold fittings Manifold taps MDPE pipe Menage package Mini click sensor Mini mist nozzle | 18-27 13 22 31 45 30 2-3 31 40 29,30 43 17,23 40 49 29 10 |
| Landscape Watering Large spiked riser Lawn kit Level switch Lever valve Light sensor Liquid Feeding Low voltage cable M Maclow clips Mains operated controller Manifold fittings Manifold taps MDPE pipe Menage package Mini click sensor Mini mist nozzle Mini ser | 18-27 13 22 31 45 30 2-3 31 40 29,30 43 17,23 40 49 29 10 38 |
| Landscape Watering Large spiked riser Lawn kit Level switch Lever valve Light sensor Liquid Feeding Low voltage cable W Maclow clips Maclow clips Manis operated controller Manifold fittings Manifold taps MDPE pipe Menage package Mini click sensor Mini mist nozzle Mini tap Mini-spin sprinkler | 18-27 13 22 31 45 30 2-3 31 40 29,30 43 17,23 40 49 29 10 38 10 |
| Landscape Watering Large spiked riser Lawn kit Level switch Lever valve Light sensor Liquid Feeding Low voltage cable M Maclow clips Maclow clips Maniso operated controller Manifold fittings Manifold taps MDPE pipe Menage package Mini click sensor Mini mist nozzle Mini-spin sprinkler Mister Mister Mini-spin sprinkler Mister Miste | 18-27 13 22 31 45 30 2-3 31 40 29,30 43 17,23 40 49 29 10 38 10 9 |
| Landscape Watering Large spiked riser Lawn kit Level switch Lever valve Light sensor Liquid Feeding Low voltage cable M Maclow clips Mains operated controller Manifold fittings Manifold taps MDPE pipe Menage package Mini click sensor Mini mist nozzle Mini-spin sprinkler Mist Propagation Mist-wean controller MP Rotator | 18-27 13 22 31 45 30 2-3 31 40 29,30 43 17,23 40 49 29 10 38 10 9 8-9 |
| Landscape Watering Large spiked riser Lawn kit Level switch Lever valve Light sensor Liquid Feeding Low voltage cable M Maclow clips Mains operated controller Manifold fitags Manifold taps Mnore speaked Min click sensor Mini mist nozzle Mini-spin sprinkler Mini-spin sprinkler Mist Propagation Mist-wean controller | 18-27 13 22 31 45 40 29,30 43 17,23 40 49 29 10 38 10 9 8-9 8 |
| Landscape Watering Large spiked riser Lawn kit Level switch Level switch Lever valve Light sensor Liquid Feeding Low voltage cable M Maclow clips Maclow clips Manis operated controller Manifold fittings Manifold taps MDPE pipe Menage package Mini click sensor Mini mist nozzle Mini-spin sprinkler Mist nozzle Mist-wean controller Mist-wean controller MP Rotator N Naan sprinklers | 18-27 13 22 31 45 30 2-3 31 40 29,30 43 17,23 40 49 29 88 10 9 88-9 88 24 |
| Landscape Watering Large spiked riser Lawn kit Level switch Lever valve Light sensor Liquid Feeding Low voltage cable M Maclow clips Maniso operated controller Manifold fittings Manifold taps Mini click sensor Mini interprise spiritude Mini tap Mini-spin sprinkler Mist Propagation Mist-Propagation Mist-Propagation N Nans sprinklers Neating tiser Neating tiser Neating tiser Manies spiritude Mist-Minies spiritude Mist-Minies spiritude Mist-Minies spiritude Minies | 18-27 13 22 31 45 30 2-3 31 40 29,30 43 17,23 40 49 29 10 9 8-9 8 24 12 4 |
| Landscape Watering Large spiked riser Lawn kit Level switch Lever valve Light sensor Liquid Feeding Low voltage cable M Maclow clips Mains operated controller Manifold fittings Manifold taps Mindick sensor Mini tap Mini tap Mini-spin sprinkler Mist rozzle Mist Propagation Mist Propagation Mist Propagation Mist Propagation Mist Propagation Min Radion N N Naan sprinklers Netafirn drippers Nozzle adjustment key | 18-27 13 22 31 45 30 2-3 31 40 29,30 43 17,23 40 49 29 10 8 10 9 8-9 8 24 |
| Landscape Watering Large spiked riser Lawn kit Level switch Lever valve Light sensor Liquid Feeding Low voltage cable M Maclow clips Mains operated controller Manifold fittings Manifold fittings Manifold taps Monifold taps Mini click sensor Mini mist nozzle Mini app Mini-spin sprinkler Mist rozzle Mist Propagation Mist-wean controller MP Rotator N Naan sprinklers Neatfirm drippers Nozzle adjustment key Nursery Watering | 18-27 13 22 31 45 30 2-3 31 40 29,30 43 17,23 40 49 29 10 9 8-9 8 24 12 4 |
| Landscape Watering Large spiked riser Lawn kit Level switch Lever valve Light sensor Liquid Feeding Low voltage cable M Maclow clips Mains operated controller Manifold fittings Manifold taps Monifold taps Monifold taps Minifolick sensor Mini mist nozzle Mini spin sprinkler Mini-spin sprinkler Mist-wean controller MP Rotator N Naan sprinklers Neading riser Nezzle adjustment key Nursery Watering O | 18-27 13 22 31 45 40 29,30 41 17,23 17,23 40 49 29 10 38 10 9 8-9 8 24 24 24-25 |
| Landscape Watering Large spiked riser Lawn kit Level switch Lever valve Light sensor Liquid Feeding Low voltage cable M Maclow clips Mains operated controller Manifold fittings Manifold fittings Manifold taps Monifold taps Mini click sensor Mini mist nozzle Mini app Mini-spin sprinkler Mist rozzle Mist Propagation Mist-wean controller MP Rotator N Naan sprinklers Neatfirm drippers Nozzle adjustment key Nursery Watering | 18-27 13 22 31 45 30 2-3 31 40 29,30 43 17,23 40 49 29 10 8 10 9 8-9 8 24 |

| Overhead irrigation | 3 |
|---|---|
| Part circle sprinkler | 12 |
| Permadrip | 21 |
| Pin plugs | 40 |
| Pipe & Fittings | 37-47 |
| Pipe (Polythene) | 40 |
| Pipe (uPVC) | 46 |
| Pipe cleaner (uPVC) | 47 |
| Pipe clips | 40 |
| Pipe cutters | 44 |
| Pipe marking tape | 40 |
| Pipe saddles | 42 |
| Plassim fittings | 42 |
| Plastic water tanks | 35 |
| Polyphosphate filter | 9 |
| Polythene pipe | 40 |
| Polythene tanks | 35 |
| Pop-up sprinklers | 24,25,49 |
| Portable hose reel | 16 |
| Pozilock fittings | 43 |
| Pre-assembled pump unit | 35 |
| Pressure booster set | 34 |
| Pressure compensated drip line | 21 |
| Pressure compensated dripper | 4 |
| Pressure gauge | 44 |
| Pressure regulator | 36 |
| Pressure vessels | 31 |
| Professional lance | 14 |
| PTFE tape | 44 |
| Pump starter boxes | 33,35 |
| Pumps | 32-36 |
| | |
| Punches | 4,7 |
| Punches Q | 4,7 |
| Punches Q Quick coupling valve | 4,7 45 |
| Punches Q Quick coupling valve Quick hose couplings | 4,7 |
| Punches Q Quick coupling valve Quick hose couplings R | 4,7 45 15,17 |
| Punches Q Quick coupling valve Quick hose couplings R Rain sensor | 4,7 45 15,17 29,30 |
| Punches Q Quick coupling valve Quick hose couplings R Rain sensor Rainsub base | 4,7 45 15,17 29,30 33 |
| Punches Q Quick coupling valve Quick hose couplings R Rain sensor Rainsub base Rain train | 4,7 45 15,17 29,30 33 50 |
| Punches Q Quick coupling valve Quick hose couplings R Rain sensor Rainsub base Rain train Rainbird sprinkler | 4,7 45 15,17 29,30 33 50 49 |
| Punches Q Quick coupling valve Quick hose couplings R Rain sensor Rainsub base Rain train Rainbird sprinkler Ratchet strap | 4,7 45 15,17 29,30 33 50 49 |
| Punches Q Quick coupling valve Quick hose couplings R Rain sensor Rainsub base Rain train Rainbird sprinkler Ratchet strap Reel irrigator | 4,7 45 15,17 29,30 33 50 49 47 51 |
| Punches Q Quick coupling valve Quick hose couplings R Rain sensor Rainsub base Rain train Rainbird sprinkler Ratchet strap Reel irrigator Rega travelling sprinkler | 4,7 45 15,17 29,30 33 50 49 47 51 |
| Punches Q Quick coupling valve Quick hose couplings R Rain sensor Rainsub base Rain train Rainbird sprinkler Ratchet strap Rede irrigator Rega travelling sprinkler Repair Plug | 4,7 45 15,17 29,30 33 50 49 47 51 50 |
| Punches Q Quick coupling valve Quick hose couplings R Rain sensor Rainsub base Rain train Rainbird sprinkler Ratchet strap Reel irrigator Rega travelling sprinkler Repair Plug Risers | 4,7 45 15,17 29,30 33 50 49 47 51 50 38 |
| Punches Q Quick coupling valve Quick hose couplings R Rain sensor Rainsub base Rain train Rainbird sprinkler Ratchet strap Reel irrigator Rega travelling sprinkler Repair Plug Risers Roses | 4,7 45 15,17 29,30 33 50 49 47 51 50 38 11,13 |
| Punches Q Quick coupling valve Quick hose couplings R Rain sensor Rainsub base Rain train Rainbird sprinkler Ratchet strap Reel irrigator Rega travelling sprinkler Repair Plug Risers Roses Rotator sprinklers | 4,7 45 15,17 29,30 33 50 49 47 51 50 38 |
| Punches Q Quick coupling valve Quick hose couplings R Rain sensor Rainsub base Rain train Rainbird sprinkler Ratchet strap Reel irrigator Rega travelling sprinkler Repair Plug Risers Roses Rotator sprinklers S | 4,7 45 15,17 29,30 33 50 49 47 51 50 38 11,13 |
| Punches Q Quick coupling valve Quick hose couplings R Rain sensor Rainsub base Rain train Rainbird sprinkler Ratchet strap Reel irrigator Rega travelling sprinkler Repair Plug Risers Roses Rotator sprinklers S Saddles | 4,7 45 15,17 29,30 33 50 49 47 51 500 38 11,13 144 24 |
| Punches Q Quick coupling valve Quick hose couplings R Rain sensor Rainsub base Rain train Rainbird sprinkler Ratchet strap Redel irrigator Rega travelling sprinkler Repair Plug Risers Roses Rotator sprinklers S Saddles Saddle hole cutter | 4,7 45 15,17 29,30 33 50 49 47 51 50 38 11,13 24 |
| Punches Q Quick coupling valve Quick hose couplings R Rain sensor Rainsub base Rain train Rainbird sprinkler Ratchet strap Reel irrigator Regai travelling sprinkler Repair Plug Risers Roses Rotator sprinklers S S Saddles Saddle hole cutter Screen filters | 4,7 45 15,17 29,30 33 50 49 47 51 50 38 11,13 24 42 42 |
| Punches Q Quick coupling valve Quick hose couplings R Rain sensor Rainsub base Rain train Rainbird sprinkler Ratchet strap Reel irrigator Repair relling sprinkler Repair relling sprinkler Repair relling sprinkler Resea travelling sprinkler Repair Plug Risers Roses Rotator sprinklers S Saddle bole cutter Screen filters Semi-automatic filter | 4,7 45,15,17 29,30 33 50 49 47,51 51,13 14,13 24 42 44,36 36 |
| Punches Quick coupling valve Quick hose couplings R Rain sensor Rainsub base Rain train Rainbird sprinkler Ratchet strap Reel irrigator Rega travelling sprinkler Repair Plug Risers Roses Rotator sprinklers S Saddle bole cutter Screen filters Semi-automatic filter Shrub head sprinklers | 4,7,7 45,17 29,300 333 333 499 47 47 511 11,131 244 422 442 424 436 436 436 436 436 436 436 436 436 43 |
| Punches Quick coupling valve Quick hose couplings R Rain sensor Rainsub base Rain train Rainbird sprinkler Ratchet strap Reel irrigator Rega travelling sprinkler Repair Plug Risers Roses Rotator sprinklers S Saddles Saddle hole cutter Screen filters Semi-automatic filter Shrub head sprinklers Signal cable | 4,7,4 4,7 4,7 |
| Punches Q Quick coupling valve Quick hose couplings R Rain sensor Rainsub base Rain train Rainbird sprinkler Ratchet strap Reel irrigator Rega travelling sprinkler Repair Plug Risers Roses Rotator sprinklers S Saddles Saddle hole cutter Screen filters Semi-automatic filter Shrub head sprinklers Signal cable Sled riser | 4,7,4 45,4 45,1 45,1 45,1 45,1 45,1 45,1 45 |
| Punches Q Quick coupling valve Quick hose couplings R Rain sensor Rainsub base Rain train Rainbird sprinkler Ratchet strap Reel irrigator Rega travelling sprinkler Repair Plug Risers Roses Rotator sprinklers S Saddles Saddle hole cutter Screen filters Semi-automatic filter Shrub head sprinklers Signal cable Sled riser Snap on hose connector | 4,7,4 45,4 45,1 45,1 45,1 45,1 45,1 45,1 45 |
| Punches Q Quick coupling valve Quick hose couplings R Rain sensor Rainsub base Rain train Rainbird sprinkler Ratchet strap Reel irrigator Regai travelling sprinkler Repair Plug Risers Roses Rotator sprinklers S Saddle hole cutter Screen filters Semi-automatic filter Shrub head sprinkler Signal cable Sied riser Snap on hose connector Softrain lance | 4,7,7 45,17 29,303 500 494 477 511 11,13 38 38 38 44 42 44 44 44 44 41 111 111 111 111 11 |
| Punches Q Quick coupling valve Quick hose couplings R Rain sensor Rainsub base Rain train Rainbird sprinkler Ratchet strap Reel irrigator Rega travelling sprinkler Repair Plug Risers Roses Rotator sprinklers S Saddle Saddle hole cutter Screen filters Semi-automatic filter Shrub head sprinklers Signal cable Sled riser Snap on hose connector Softrain lance | 4,7,7 45,17 29,303 333 500 49 49,47 75111 11,133 38,36 36,63 36,63 36,63 31,111 11,111 11,111 11,111 11,111 11,111 11,111 11,1111 11,11 |
| Punches Q Quick coupling valve Quick hose couplings R Rain sensor Rainsub base Rain train Rainbird sprinkler Ratchet strap Reel irrigator Repair Plug Risers Roses Rotator sprinklers S Saddles Saddle hole cutter Screen filters Semi-automatic filter Shrub head sprinkler Signal cable Sled riser Sonap on hose connector Softrain lance Soil stake Soleniod valves | 4,7,7 45,17 29,300 333 330 499 47 47 511 11,13 33 36 36 36 31 11,13 31 11,13 31 11,13 31 11,13 31 11,13 31 31 31 31 31 31 31 31 31 31 31 31 3 |
| Punches Q Quick coupling valve Quick hose couplings R Rain sensor Rainsub base Rain train Rainbird sprinkler Ratchet strap Reel irrigator Rega travelling sprinkler Repair Plug Risers Roses Rotator sprinklers S Saddle bole cutter Screen filters Semi-automatic filter Shrub head sprinkler Signal cable Sled riser Snap on hose connector Softrain lance Soil stake Soleniod valves Speedy rain | 4,7,7 45,17 29,300 333 333 349 47 47 511 11,13 13,13 13,13 13,13 11,17 1 |
| Punches Q Quick coupling valve Quick hose couplings R Rain sensor Rainsub base Rain train Rainbird sprinkler Ratchet strap Reel irrigator Repair Plug Risers Roses Rotator sprinklers S Saddles Saddle hole cutter Screen filters Semi-automatic filter Shrub head sprinkler Signal cable Sled riser Sonap on hose connector Softrain lance Soil stake Soleniod valves | 4,7,7 45,17 29,300 333 330 499 47 47 511 11,13 33 36 36 36 31 11,13 31 11,13 31 11,13 31 11,13 31 11,13 31 31 31 31 31 31 31 31 31 31 31 31 3 |

| Sports | 48-51 |
|--|-------------|
| Spray gun | 14 |
| Sprinkler heads | 10,12 |
| Sprinklers | 10-13 |
| Stake risers | 11,13,18,19 |
| Stock bed watering kit | 6 |
| Stopcock | 42,45 |
| Strainer | 45 |
| Straining wire | 47 |
| Submersible pumps | 33 |
| Suction hose | 33 |
| Swing joints | 25 |
| Т | |
| Tall bedding spike | 11 |
| Tanks | 35 |
| Tank connector | 36 |
| Tank fittings | 36 |
| Tank pump | 34 |
| Taps | 45 |
| Tap timer | 28 |
| Tape-PTFE | 44 |
| Tape-Trickle | 6 |
| Temporary lawn watering | 22 |
| Threaded fittings | 39 |
| Threaded valves | 45 |
| Toolkit | 44 |
| Travelling sprinkler | 50 |
| Tree watering dripper | 5 |
| Trickle tape | 6 |
| Tricoflex hose | 15 |
| T-tape & fittings | 6 |
| Tunnel watering | 3 |
| U | |
| Underground valves | 45 |
| Union fittings | 45,47 |
| uPVC pipe & fittings | 46-47 |
| v | |
| Valve-ball | 45,46 |
| Valve-barbed | 41 |
| Valve-boxes | 23,48 |
| Valves | 45 |
| Vibro-spin sprinkler | 10 |
| W | |
| Wall mounted hose reel | 16 |
| Wall plate | 45 |
| Warning label | 44 |
| Water meter | 44 |
| Water pipe | 40 |
| Water storage pump | 33 |
| Weather station | 30 |
| Well pumps | 33 |
| Wet leaf | 9 |
| Wet leaf controller | 8 |
| Wet leaf interface | 30 |
| Wi-Fi controller Wire & strainer | 29 |
| Wire & strainer | 47 |
| <u>- </u> | 15 |
| 'Y' piece | 15 |
| Yellow hose | 15 |



Access Irrigation Ltd, Crick, Northampton, NN6 7XS UK

Phone: 01788 823811

E-mail: sales@access-irrigation.co.uk
Web: www.access-irrigation.co.uk